

## 35 系列(Series)-J35BH006 混合式步进电机(Hybrid Stepper Motor)



### 主要技术参数 Main technical parameters

引出线形式 Lead out line type

两相4线 Two Phase 4-line

驱动方式 Drive model

双极恒电流双四拍驱动 Bipolar constant

current double four beat drive

工作制 Working system

真空长时 Long term vacuum

步距角 Step angle

1.8°

额定电压 Rated voltage/VDC

28

保持转矩 Holding torque/N·m

≥0.16@A&B 通(Electrify)0.5A

自定位转矩 Detent torque/N·m

≥0.018

步距角误差 Step angle error

±5%

相电阻 Phase resistance/Ω

/

相电感 Phase inductance/mH

/


牵出力矩 Pullout torque/N·m

≥0.1@36r/min


重量 Weight/kg

≤0.22

### 外形图(Outline Drawing)/mm

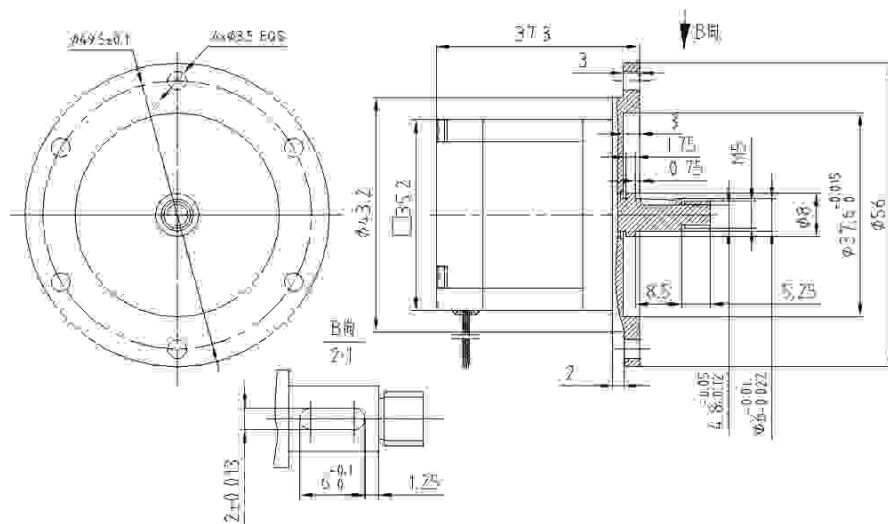


### 其他补充(Other Supplements)

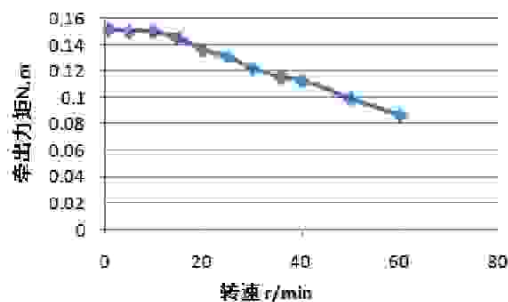

牵出转矩特性(Pullout torque frequency characteristics)

### 电路图(Circuit Diagram)



引出线定义 Definition of lead wire

| A 相正             | A 相负             | B 相正             | B 相负             |
|------------------|------------------|------------------|------------------|
| A-phase positive | A-phase negative | B-phase positive | B-phase negative |

引出线标识 Identification of lead wire

| A+ | A- | B+ | B- |
|----|----|----|----|
|----|----|----|----|