


70 系列-J67LWX01-正弦波内转子 (70 series - J67LWX01 - Sine Wave Internal Rotor)

 定子 (Stator) 转子 (Rotor)	主要技术参数 Main technical parameters	
	驱动方式 Driving method	正弦波 Sine wave
	工作制 Working system	真空长时工作 Vacuum long-time operation
	极对数 Number of poles	16
	额定电压/V Rated voltage/V	28
	连续堵转转矩/N·m Continuous blocking torque/N·m	≥0.5
	转矩系数/(N·m/A) Torque coefficient(N·m/A)	≥0.73
	峰值堵转转矩/N·m Peak blocking torque /N·m	≥0.65
	峰值电流/A Peak current/A	≤2.0
	空载转速/(r/min) No-load speed/(r/min)	390±10%
	相电阻/Ω Phase resistance/Ω	9.7±10%
	相电感/mH Phase inductance/mH	7.2±20%
	转矩波动系数 Torque fluctuation coefficient	≤5%
齿槽转矩/N·m Cogging torque/N·m	/	
重量/kg Weight/kg	≤0.3	

外形图/mm (Outline drawing/mm)

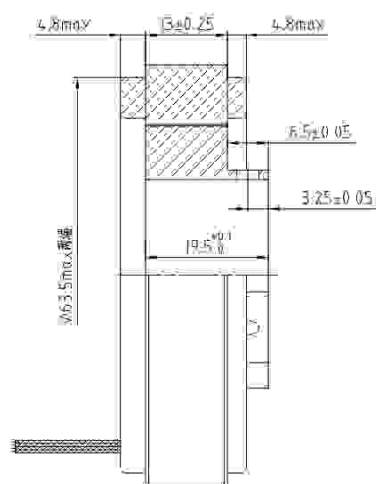

电路图 (Circuit Diagram)

引出线定义 Lead wire definition	A 相 A phase	B 相 B phase	C 相 C phase
引出线标识 Lead wire identification	A	B	C