


75 系列-J75LWX03-正弦波内转子 (75series - J75LWX03 - Sine Wave Internal Rotor)

 定子 (Stator) 转子 (Rotor)		主要技术参数 Main technical parameters	
		驱动方式 Driving method	正弦波 Sine wave
		工作制 Working system	真空长时工作 Vacuum long-time operation
		极对数 Number of poles	16
		额定电压/V Rated voltage/V	28
		连续堵转转矩/N·m Continuous blocking torque/N·m	≥0.8
		力矩系数/(N·m/A) Torque coefficient/(N·m/A)	≥0.83
		峰值堵转转矩/N·m Peak blocking torque /N·m	≥1.0
		峰值电流/A Peak current	≤2.0
		空载转速/(r/min) No-load speed/(r/min)	330±10%
		相电阻/Ω Phase resistance/Ω	7.2±10%
		相电感/mH Phase inductance/mH	6±20%
		转矩波动系数 Torque fluctuation coefficient	≤5%
		齿槽力矩/N·m Cogging torque/N·m	/
		重量/kg Weight/kg	≤0.36
		外形图/mm (Outline drawing/mm)	

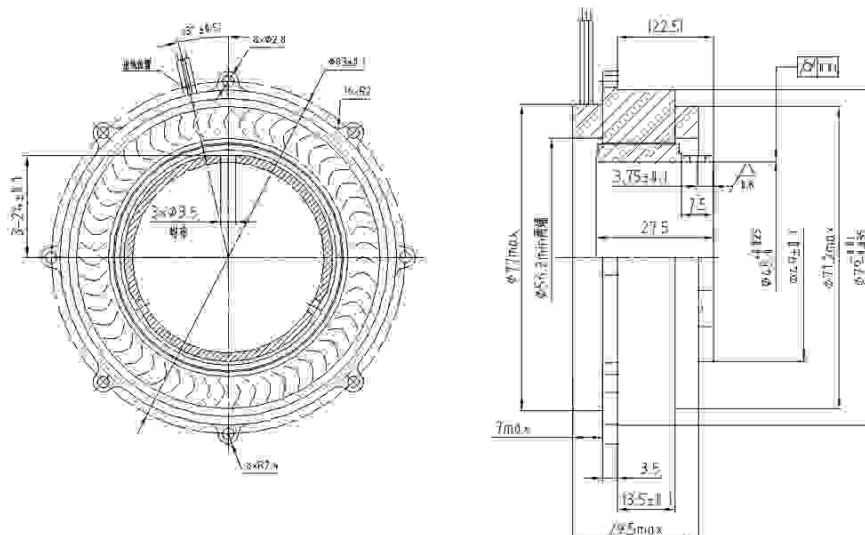

安装要求及注意事项

(Installation Requirement and Precautions)

- 安装端面保证 22.5 ± 0.1 (The mounting surface is guaranteed to be 22.5 ± 0.1);
- $\Phi 79$ 和 $\Phi 45$ 安装面同轴度保证在 0.05mm 以内 (The coaxiality of $\Phi 79$ and $\Phi 45$ mounting surfaces is guaranteed to be within 0.05mm .)

电路图 (Circuit diagram)

引出线定义 Lead wire definition	A 相 A phase	B 相 B phase	C 相 C phase
引出线标识 Lead wire identification	A	B	C