

无刷直流风机 (Dc Brushless Fan)

J85FZW59-80GD

□95.5×82.5mm



产品功能 (FUNCTION)

- ✓ 防反接
Polarity Protection
- ✓ 软启动
Soft Start
- ✓ 逆风起动
Push against the wind
- ✓ 模拟信号调速
Analog signal speed regulation
- ✓ 故障报警
Fault alarm
- ✓ 堵转保护与自动重启
Locked-rotor protection and automatic restart
- ✓ 超转保护
Overspeed protection

产品参数 (PARAMETER)

额定电压 Rated Voltage (VDC)	功率 Power (W)	基准转速 Rated Speed (r/min)	最大静压 Static Pressure (Pa)	最大风量 Air Flow (m³/h)	噪声 Acoustic Noise (dB(A))	重量 Weight (g)	工作温度 Operating Temperature (℃)
28	≤150	≥15000	≥1400	≥400	≤80	≤550	-55~+100

环境适应性&电磁兼容 (Environmental adaptability& EMC)

环境适应性: 满足 GJB7246-2011, 以及 GJB150.24A-2009 温度-高度-湿度、GJB4.8-1983 颠簸、GJB150.12A-2009 沙尘、GB/T4208-2008 浸渍试验。


Environmental adaptability: Meet GJB 7246-2011, as well as GJB150.24A-2009 temperature-height-humidity, GJB4.8-1983 bump, GJB150.12A-2009 sand and dust, GB/T4208-2008 impregnation test.

电磁兼容: 满足 GJB151B-2013 中 CE102、CS101、CS114、RE102、RS101、RS103 测试项。

EMC: Meet the test items of CE102, CS101, CS114, RE102, RS101 and RS103 in GJB151B-2013

外形安装尺寸 (DIMENSION)

PQ 曲线 (PQ curve)

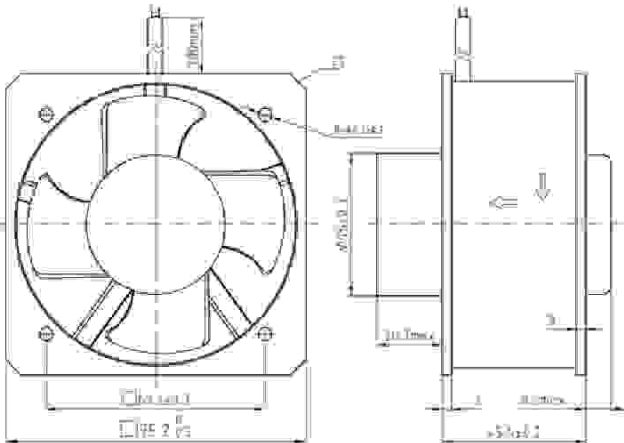

引出线定义 (Lead wire)

导线功能 (Wire Function)	电源正 (VCC)	GND	调速 (Speed regulation)	故障信号 (Fault signal)
导线颜色 (Wire Color)	红 (RED)	黑 (BLACK)	绿 (GREEN)	黄 (YELLOW)

