

Neon Flex Specification

N014060CC4DC0(N1425)





IP65



Product Parameter

- 14x25mm Side View Neon flex, can be bend up and down;
- Light source: high-light LED chip;
- Control mode: differential parallel DMX512(1990) signal protocol, built-in anti-interference module,strengthen anti-interference ability;
- Process material: high light transmittance and environment-friendly silica gel material with good flexibility;
- Optical design: unique optical light distribution structure design, uniform surface light without shadow;
- Working / storage temperature: Ta: -25~55°C / 0°C~60°C;
- Product application: signature lighting, outdoor/interior decoration, architectural contour application;
- 2 years of quality guarantee, working life ≥ 36000 hours.

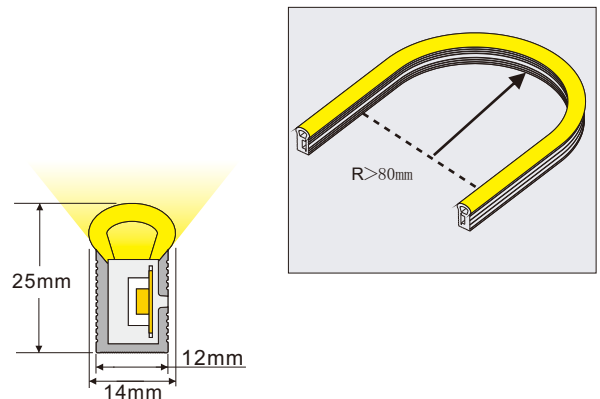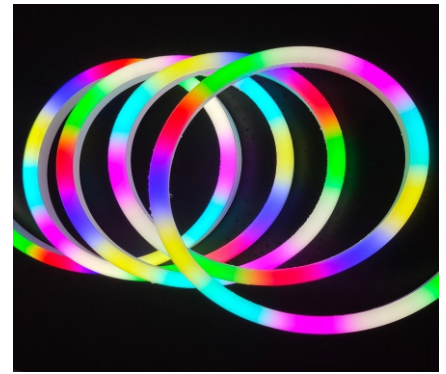


Photoelectric parameters

PN	Color	CCT	CRI	Voltage	Pixel	Power	Cutting Length	Brightness (lm/M)	Standard Length	Max Length
N014060CC4DC0 (N1425)	RGBW	3000K	≥ 80	DC24V	10Pixel/M	19.2W/m	100mm	321.8lm/M	5m	15m
N014060CC4DC0 (N1425)		4000K						338.8lm/M		15m
N014060CC4DC0 (N1425)		6000K						355.7lm/M		15m

Remarks:

1. The above parameters are tested based on 1M standard products;
2. The luminous flux is allowed to have an error range of $\pm 10\%$;
3. The above parameters are typical values;
4. When this neon led is longer than 5 meters, it needs power from both ends;
5. Subject to change without prior notice.

Product light distribution curve

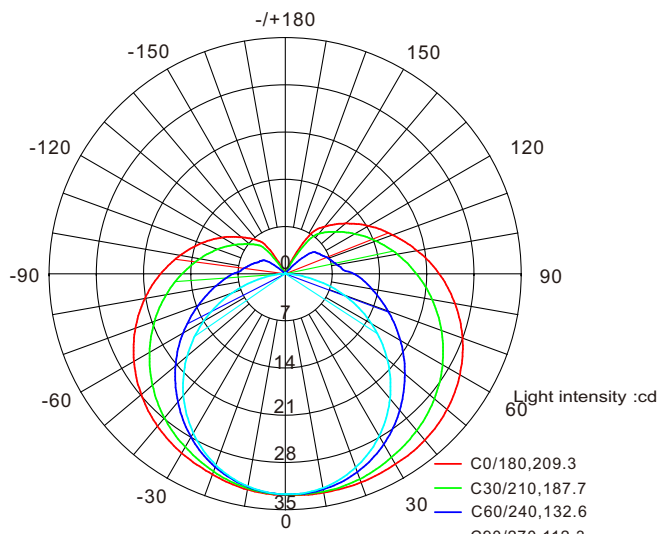

Average beam angle (50%): 164° degrees

Light distribution curve

Note: the above data is based on monochrome 4000K color temperature

Luminous output:77.68m

Height	Eavg,Emax	diameter
1m	10.58,32.85lx	296.59cm
2m	2.646,8.214lx	593.18cm
3m	1.176,3.651lx	889.77cm
4m	0.6614,2.053lx	1186.36cm
5m	0.4233,1.314lx	1482.95cm
6m	0.2940,0.9126lx	1779.54cm
7m	0.2160,0.6705lx	2076.13cm
8m	0.1653,0.5134lx	2372.72cm
9m	0.1306,0.4056lx	2669.31cm
10m	0.1058,0.3285lx	2965.89cm


Note: the curve is the illumination area and the average illumination within the area of the lamp under different projection distance

Effective average illumination

Mechanical parameters


Unit: mm/in

Silicone end cap -
Straight outlet

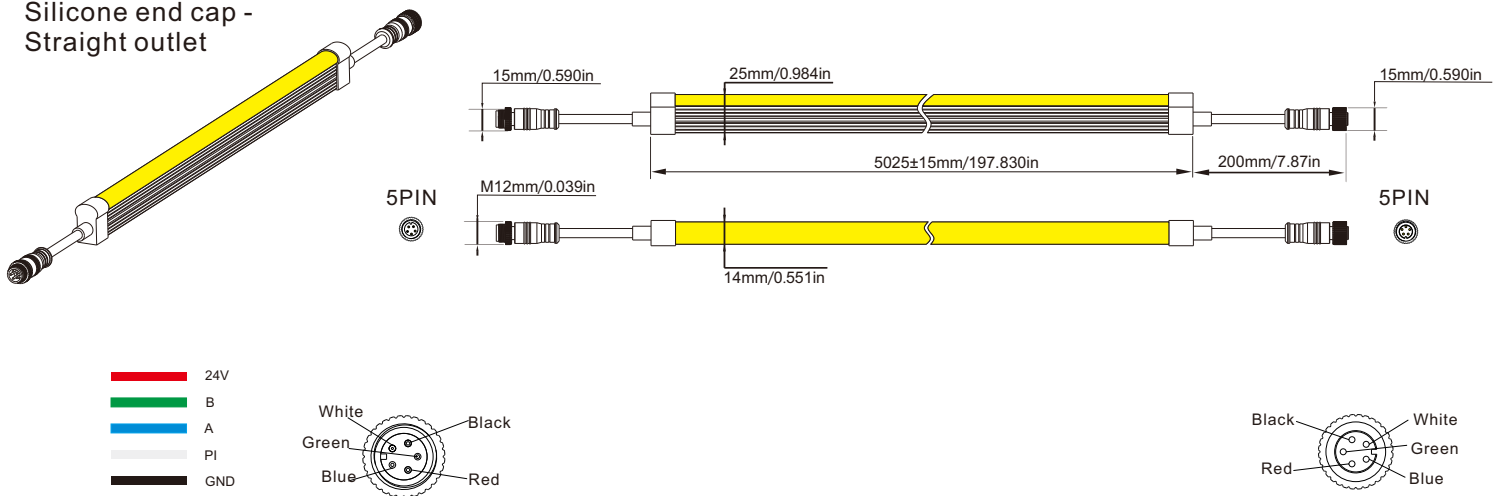

Silicone end cap - side outlet


Unit: mm/in

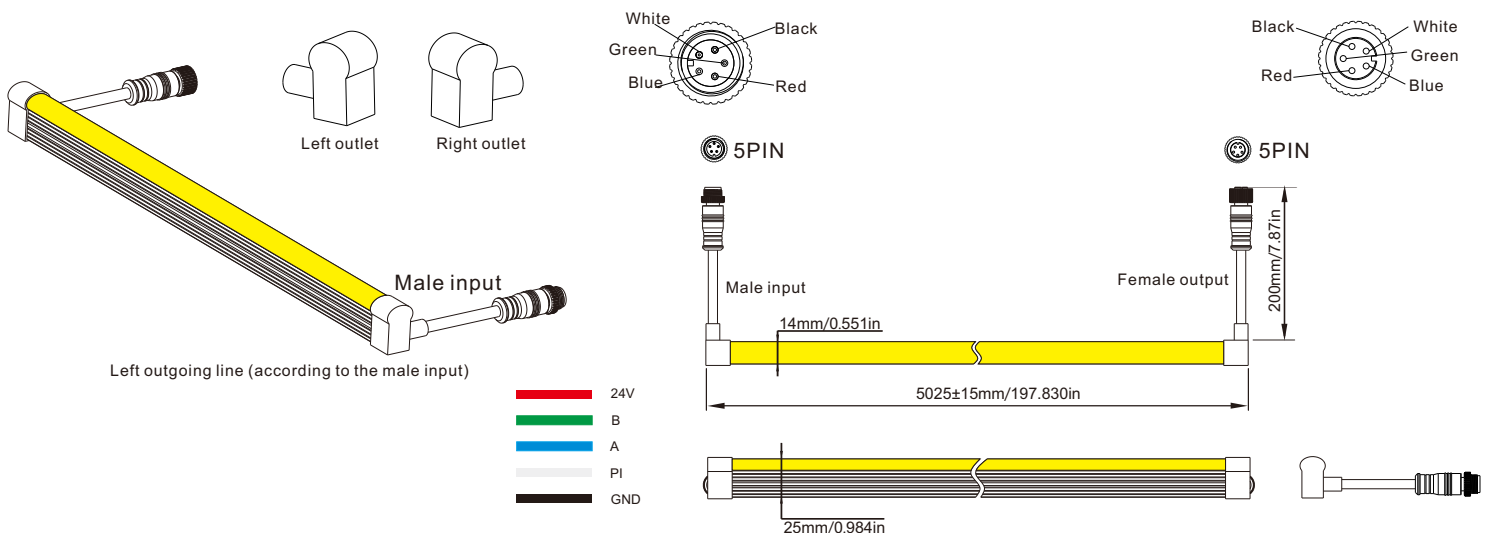




10x20mm installation diagram

Wipe the dust on the installation luminous surface with clean water.





First fix the buckle with screws, and then clip the neon light strip into the buckle. When the length of the neon light strip is greater than 2 meters, two people are required to install it together. (refer to the figure below)




Overall dimension of buckle: L30*W12.8*H14.5mm


L1.181*W0.503*H0.570in



Surface


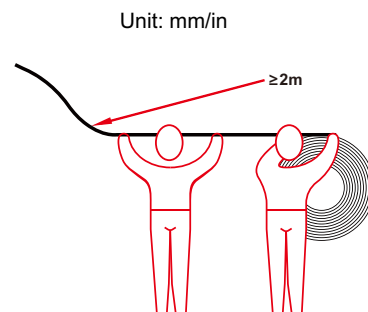


When the length of neon light strip is more than 2 meters, two people are required to install it together.




Overall dimension of aluminum profile: L1000*W14*H20mm


L39.37*W0.551*H0.787in



Surface




Mounted embedded




Mounted embedded

Correct installation method


①









②



③



Error installation method

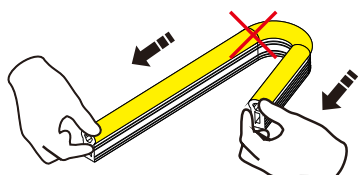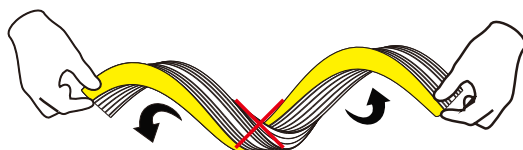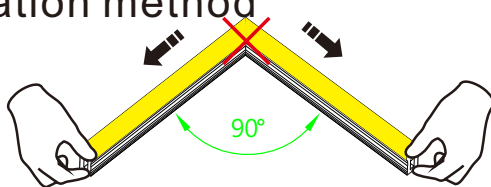





Cutting and the waterproof treatment of both ends

By default, our products will be shipped in regular lengths according to customer requirements.

If the customer has to cut and assemble on site, we can provide some end caps with holes and end caps without holes (all sections can be used). However, please note that in this case, the front and rear ends must be glued for waterproof treatment.

Cutting method

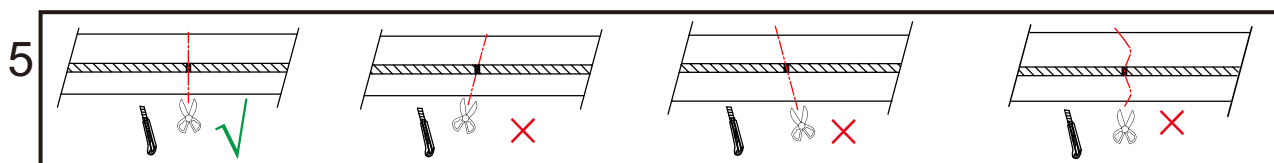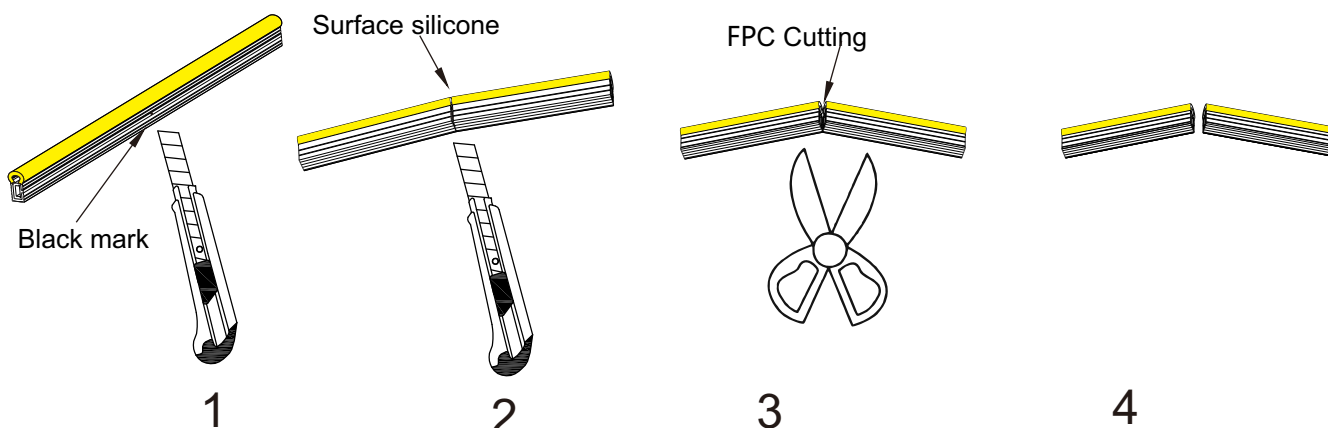

Cutting precautions

Waterproof treatment after cutting

1. The cut output end is glued and plugged with a non hole end cap (Fig. 1);
2. If there is no welding cable at the head and tail ends after cutting, first thread the male wire through the end cap, then weld it to the head end of the LED neon flex, and then apply glue for waterproof treatment (Fig. 2);
3. If there is no cable at the input end of cutting, and the male input cable must be welded (Fig. 3).

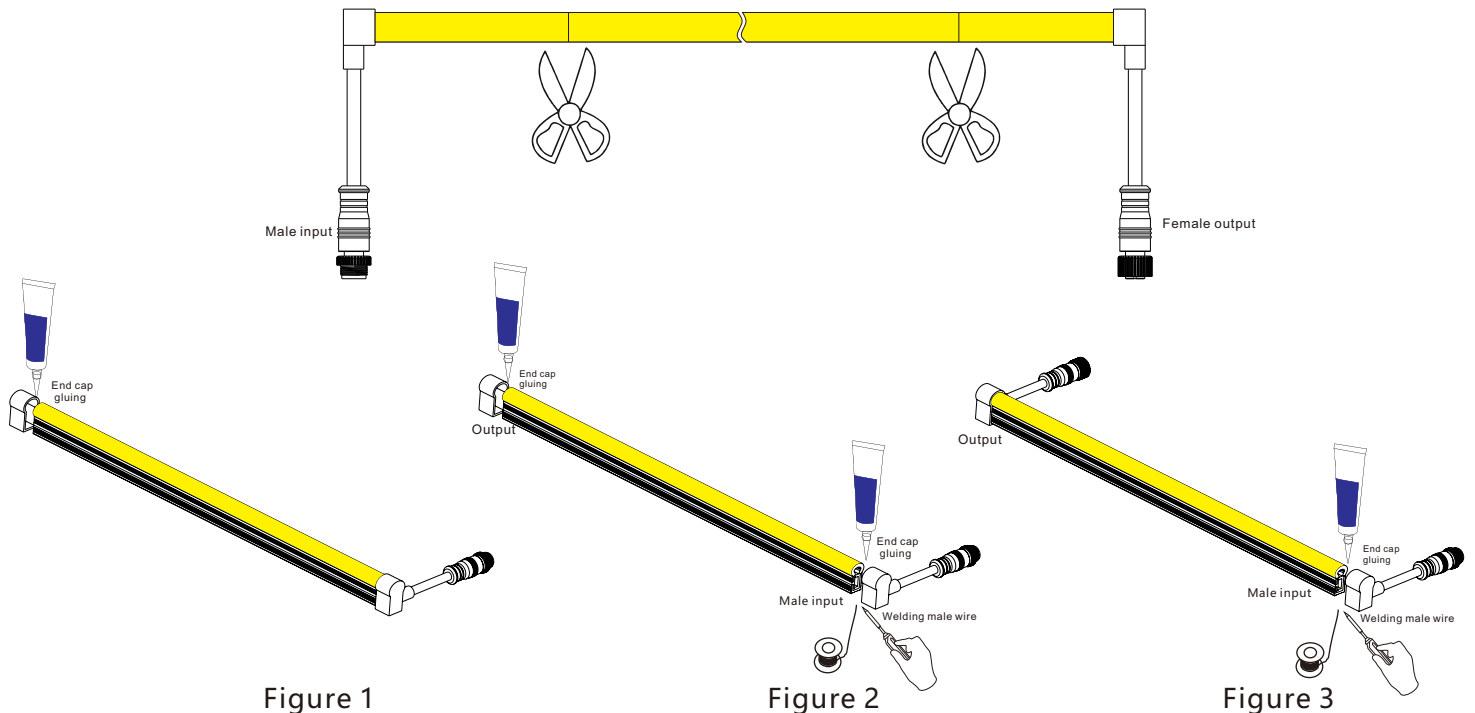


Figure 1

Figure 2


Figure 3

matters needing attention


- Please use the isolated power supply of 24 V DC to drive the led neon flex, and the ripple of the constant voltage source is less than 5%. It is not allowed to drive the led neon flex with the power supply of resistance capacitance type step-down, non isolated and other types.
- In practical application, the power supply should reserve 20% margin (it is recommended to use only 80% power) to ensure sufficient voltage to drive products.
- Please operate carefully. When the power is connected, do not touch the AC power terminal to prevent electric shock.
- Pay attention to the positive and negative poles of the power line. Do not connect them incorrectly. Check whether the voltage of the power supply is consistent with that of the product to avoid product damage.
- Please avoid scratching, twisting and irregular bending of the product during installation, otherwise it may cause irreparable damage to the product.
- In order to ensure the service life and reliability of the led neon flex, please do not bend in the arc with a radius of less than 80 mm. Too small bending radius will damage the product itself.
- If the actual application length exceeds the specified length, it will lead to overload, heating, uneven brightness and other phenomena.
- In order to protect your eyes from injury, try to avoid staring at the luminous surface of the led neon flex for a long time.
- Non professional personnel are forbidden to install, disassemble and repair the product.
- It is strictly prohibited to use any acidic or alkaline adhesive to fix the product (including but not limited to glass adhesive, etc.).
- The use scenarios of different IP grades of products are different, and IP 65 is not suitable for immersion environment.
- Due to structural differences of products with different sizes and specifications under the same color temperature value, the final color of the product is slightly deviated, which shall be confirmed before use.
- Please use professional cutting tools when cutting.

Waterproof connector installation diagram

Correct installation steps

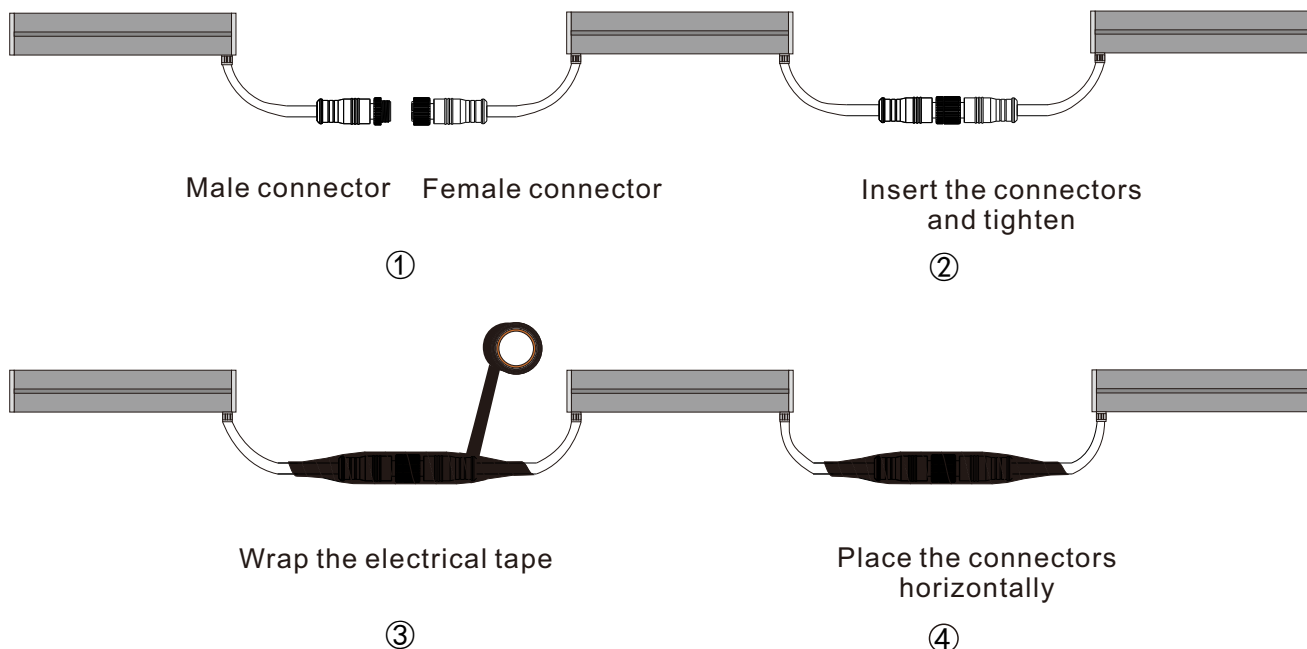


Wrong installation ways

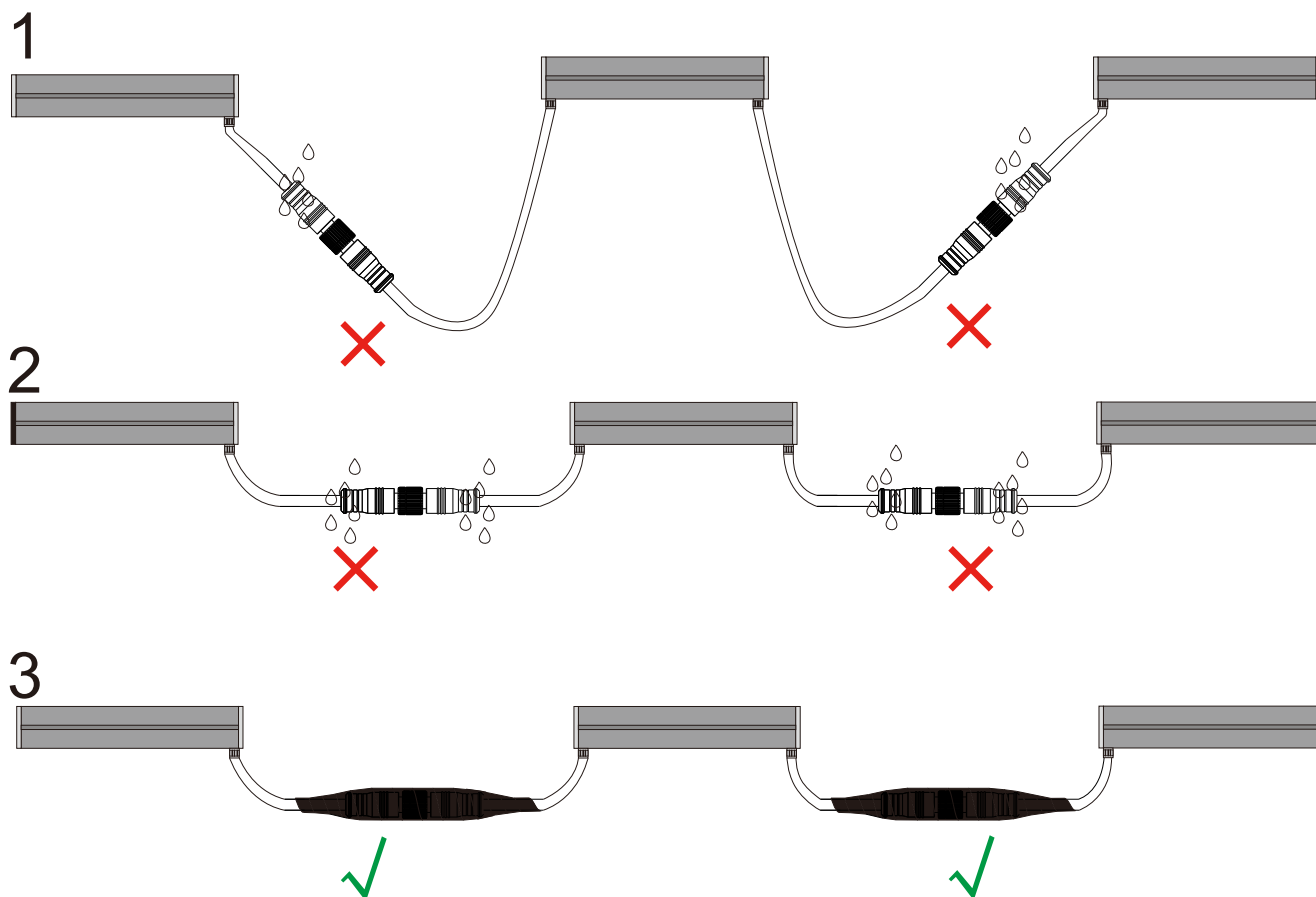

Tips: Figures 1 and 2 are in harsh environments where water may enter. Please follow Figure 3 and wrap the electrical tape or waterproof tape firmly during the construction process firmly


Main control - integrated control wiring diagram computer

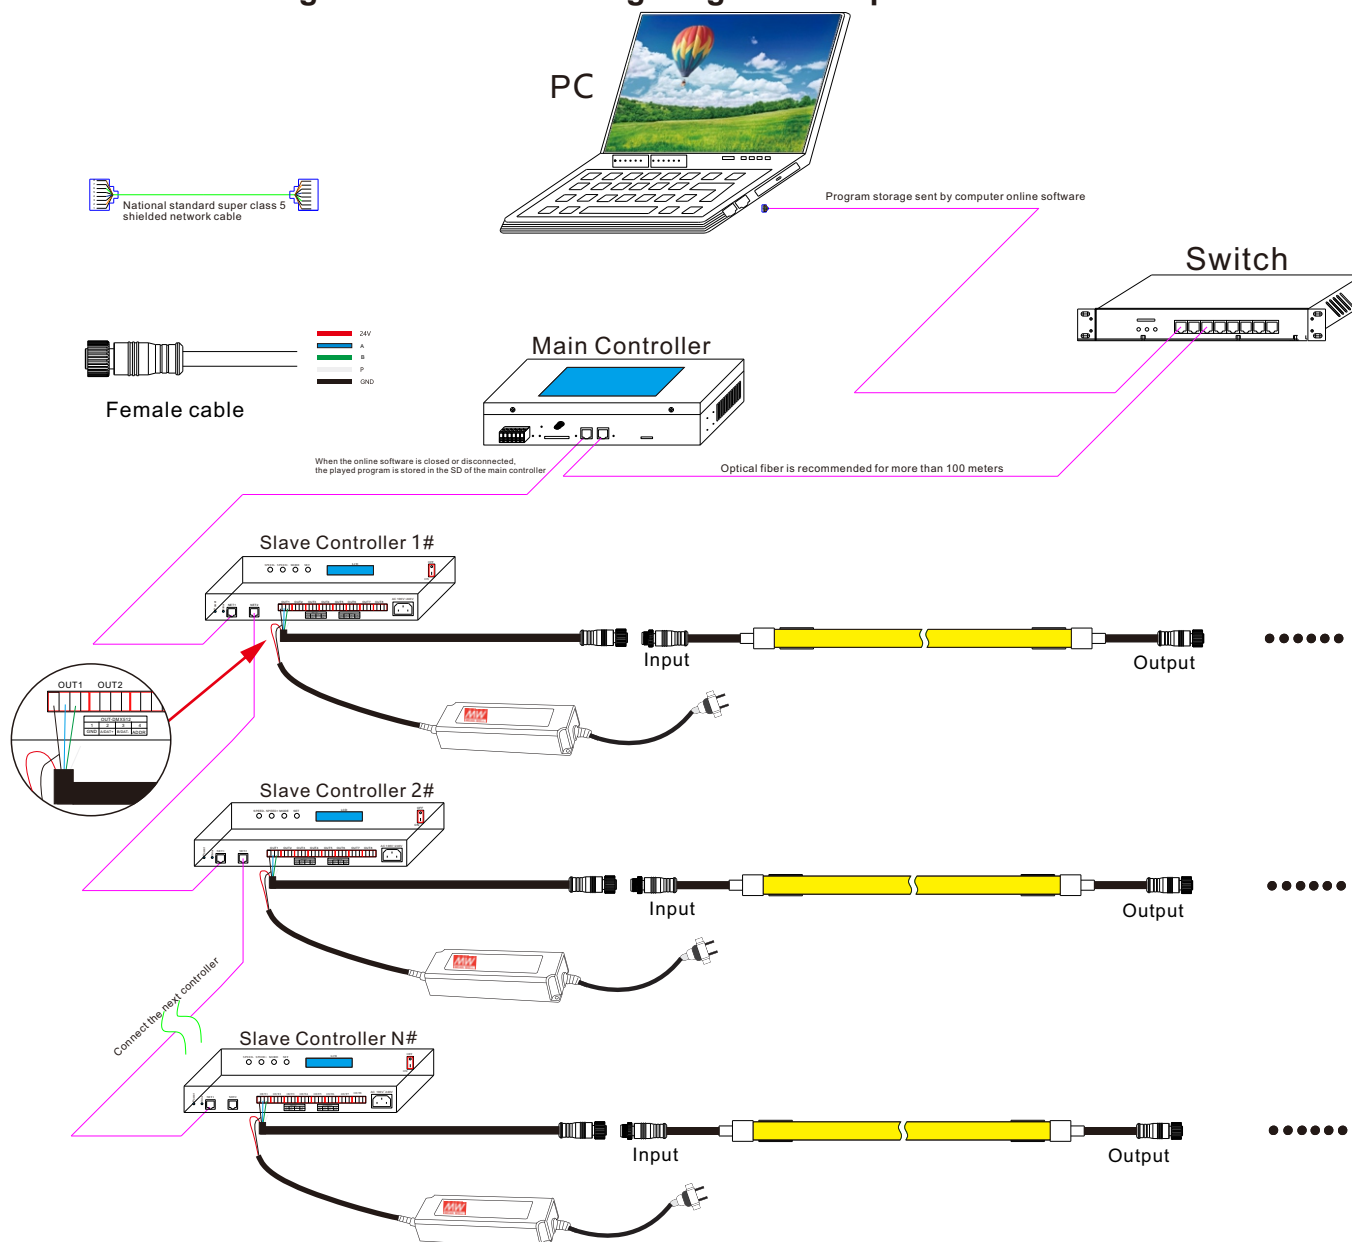

Product control system solution

Product picture	Name	PN	Product specifications	Applicable products
	Main controller	XS-809-A	Power supply: ac110-240v Power: 10 W Data interface: network interface Memory card type: SDHC card Operating temperature: -10 °C - 60 °C Size: 260mm * 160mm * 52mm(L*W*H) Weight: 2.0kg	SPI Neon flex DMX512Neon flex
	Slave controller	T-790	Power supply: ac110-240v Power: 5 W Output type: 4Pin connector Operating temperature: -20 °C - 85 °C Size: 310mm * 152mm * 42mm(L*W*H) Weight: 2.0kg	SPI Neon flex DMX512Neon flex
	Offline controller	K-1000C	power supply: DC 5V or DC 12-24V input Power consumption: 2 W Output type: 3pin terminal block Operating temperature: -30 °C - 85 °C Size: 159mm * 89mm * 24mm(L*W*H) Weight: 0.35kg	SPI Neon flex DMX512Neon flex


Product Accessories

Name	Describe	Picture	Product item No	Net weight (g)	Product size (mm)	Remarks
Alum LED Profile	Pre installation slot		40301-0052-00	136g	L1000xW14xH20	Aluminum
Alum LED Profile	Pre installation slot		40301-0047-00	3.58g	L30xW12.8xH14.5	Aluminum
Modeling carrier	Shapable mounting slot		40301-0053-00	395g	L5000xW12.8xH14.5	Stainless steel
Straight outlet end cap	Silicone front outlet end cap		40401-0164-00	2.36g	L26xW16xH27	Silicone
Side outlet end cap	Silicone side outlet end cap		40401-0119-00	4.78g	L23xW28.5xH28	Silicone
Seal the end cap	Silicone sealing end cap		40401-0120-00	2g	L14xW16xH26	Silicone
Filling glue	300h mono molecular silica gel		70101-0009-00	125g	L32xW46xH17	Liquid glue
Female Connector	5PIN connector		50805-0026-00	23g	φ 15xL200	PVC
Male Connector	5PIN Connector		50705-0001-00	18g	φ 15xL200	PVC
Connector	5PIN IP65 Connector		/	/	/	PVC
Power supply	240W waterproof power supply		11401-0114-00	1.38Kg	L244.2xW68xH38.8	/
Power supply	350W Non-waterproof power supply		11401-0029-00	0.82Kg	L215xW115xH30	/
Power supply	400W rainproof power supply		11401-0169-00	1.23Kg	L220.4xW130xH48	/

Product packaging

· Standard packaging

1.For carton packaging, the line label is pasted 80mm away from the end of the line, the information label is pasted on the product, and the product information label and box number label are pasted on the side of the carton,QC inspection stamp.




Voltage & input line
identification



Product information label




2.For single carton packaging, the line label is pasted 80mm away from the end of the line, the information label is pasted on the product, and the product information label and box number label are pasted on the side of the carton,QC inspection stamp.



Voltage & input line
identification



Product information label

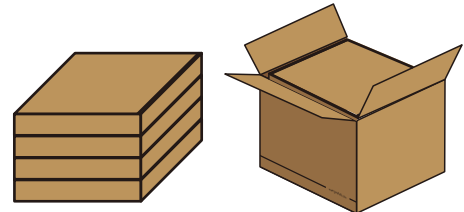

3. For wooden case packaging, the line label is pasted 80mm away from the line end, the information label is pasted on the product, and the product information label and box number label are pasted on the side of the carton,QC inspection stamp.



Voltage & input line
identification



Product information label



Name	Size	Quantity / box	Quantity / box	Net weight of single product (kg)	Net weight of each box (kg)	Gross weight (kg)	Outer box size (mm)
Carton	L5000*14*25mm	5m*2	10m	1.5	3.0	3.28	360*360*60
Carton	L5000*14*25mm	5m*8	40m	1.5	12	13.12	380*380*265
Wooden case	Customized to order	/	/	1.5	/	/	/

Reliability testing

Test item	Test requirement	Test standard	Test method or condition
Safety regulation test	Mechanical strength	GB-7000.1	Impact hammer 0.7 J
	Dust and water proof test	GB-7000.1	IP67
	Winding test	GB-7000.1	φ150mm wooden disc, 60N tension, 10 times at room temperature, 10 times after cold treatment (-15°C±2°C, 16h)
	Low temperature winding test	GB-7000.1	Winding the winding shaft, low temperature box -c, after 16h, 15 °C± 2 °C winding the winding shaft for 2 turns
	Low temperature impact test	GB-7000.1	Winding the winding shaft, low temperature box -15°C±5°C, after 16h, winding the winding shaft for 2 turns
	Insulation resistance	GB-7000.1	≤ 2MΩ
	Electrical strength	GB-7000.1	500V
Mechanical reliability test	Left and right bending test	Internal standards	With an interval of 200mm (including welding points), the left and right bends are respectively 100 times
	Distortion test	Internal standards	Twist clockwise for 5 turns and then relax. Repeat for 100 times
	Falling test	Internal standards	100 times of wrestling
Environmental reliability test	High temperature storage	GB/T 2423.2	60°C, 168 hours
	Low temperature storage	GB/T 2423.1	-30°C, 168 hours
	High temperature and humidity operation	GB/T 2423.3	60°C, 85%RH
	Salt spray Test	GB/T 2423.17	5% salt solution concentration, 24h
	IK Test	GB/T 20138	Each exposed surface bears 5 impacts
	Normal temperature aging	Internal standards	25°C, 6000 hours
	Switching impulse	Internal standards	10s on, 10s off, 10000 times