

6mm 2835 single color S Shape LED strip 60LEDs/m DC12V/DC24V



◆ Product Description:

- S shape(zigzag) flex led strip with SMD2835 static color 60LEDs/m
- The biggest advantage is the S shape, which can be bend at any angle
- Only available in IP20 non-waterproof version
- Standard 5m per roll, the length also can be customized






◆ Product Datasheet

Product Number	S006060BB1LZ(S)	S006060BC1LZ(S)
Operating Voltage	DC12V	DC24V
Power/m	4.8W	4.8W
SMD Type	SMD 2835	SMD 2835
LED Qty/m	60	60
Cutting Length	50mm / 3LED	100mm / 6LED
Color	W:3000K/4000K/6500K	W:3000K/4000K/6500K
Luminance/m	W:515lm	W:515lm
SDCM	< 5	< 5
Ra	90	90
Beam Angle	120°	120°
Size (mm)	5000x6mm	5000x6mm
IP Rate	IP20	IP20
Operation Temperature	- 25 ~ 60°C	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, $\pm 15\%$ tolerance is normal.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit:mm/in)

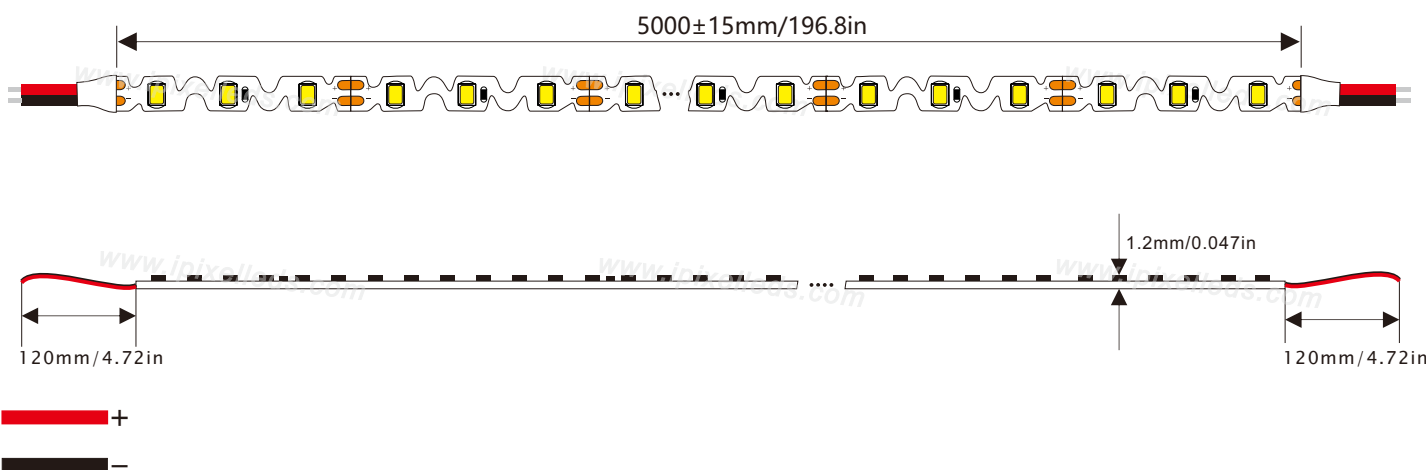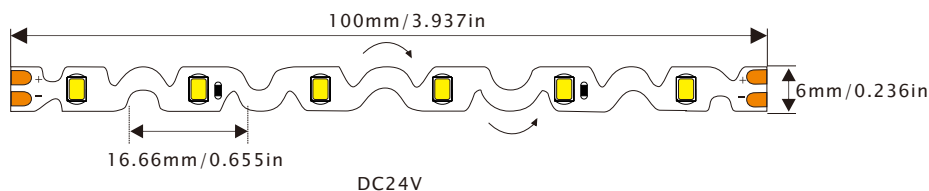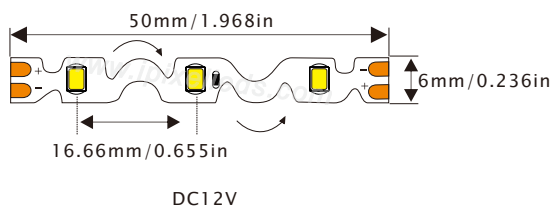

Wiring diagram

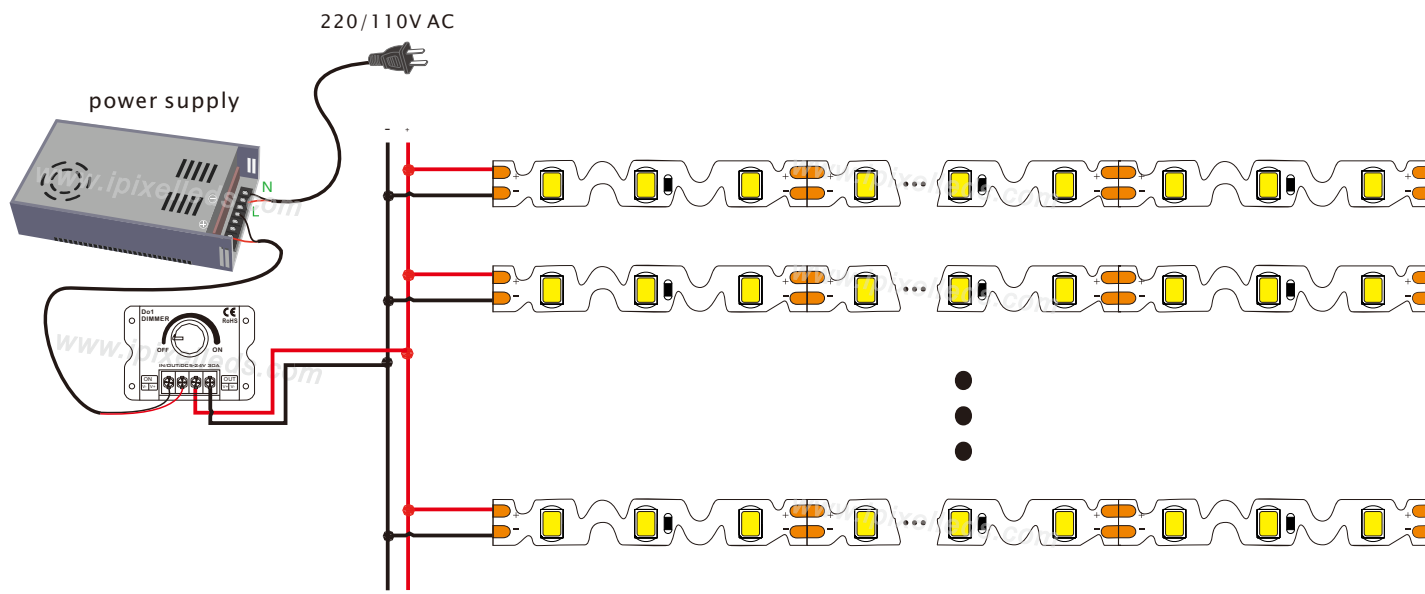

◆ IP Rating

IP20



◆ Related products




Power supply
LRS-350-12
LRS-350-24




RF dimmer
D01


◆ Installation method:




Can be cut




Don't peel all 3M tape at once.



fold

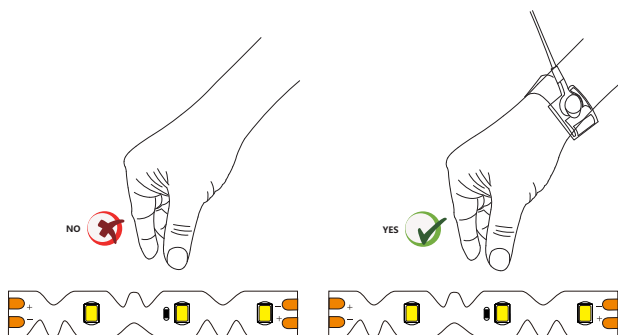

Pls wear the electrostatics ring for avoid ESD

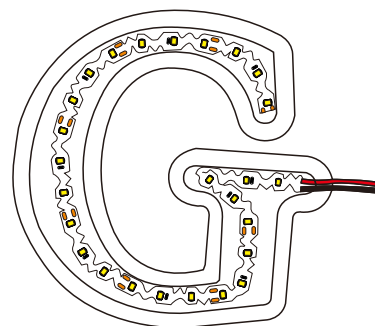


modeling


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.24-05-29