

5050 double row single color LED strip 120LEDs/M DC24V



◆ Product Description:

- 5050 LED chip, 120LEDs/m, double row
high luminance efficiency and high Ra
- Input voltage DC24V
- Flexible PCB, FPC color: white
- Standard length 5m per roll, the length also can be customized




◆ Product Datasheet

Product Number	S015120CC1LZ
Operating Voltage	DC24V
Power/m	28W
SMD Type	SMD 5050
LED Qty/m	120
Cutting Length	50mm / 6LED
Color	W:3000K/4000K/6500K
Luminance/m	W:2350lm
Ra	≥80
Beam Angle	120°
Size (mm)	5000x15mm
IP Rating	IP20
Operation Temperature	- 25 ~ 60°C


Remarks:

- 1.The above parameters were tested according to integrating sphere TM-30-15.
- 2.The output data is based on IP20 and one merter.
- 3.The data such as power etc, ±15% tolerance is normal; Luminance is based on CCT 3000K.
- 4.IP protection process causes changes in size, CCT and luminous flux.

Outline Dimension (unit:mm/in)

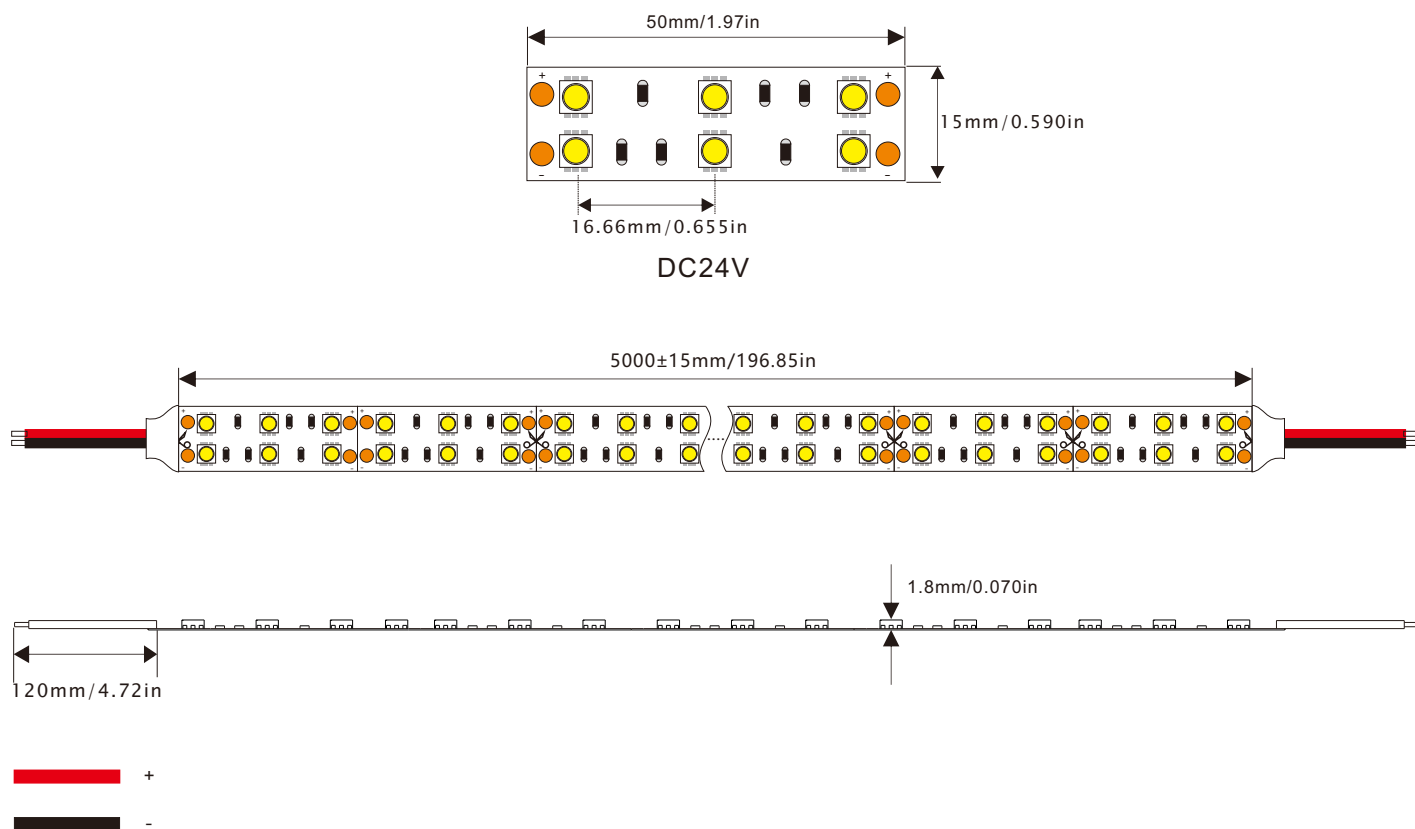

Wiring diagram

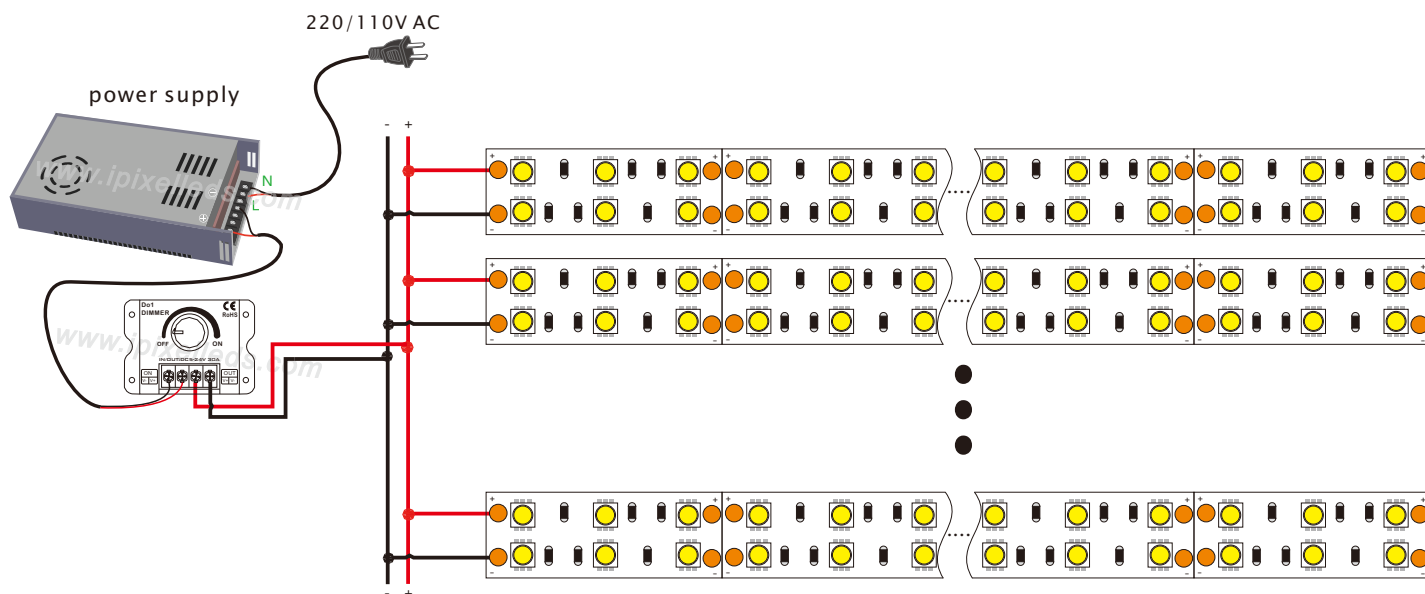

IP Rating

IP20



◆ Related products:



Power supply
LRS-350-24




Alum profile
LL3535D




RF dimmer
D01





◆ Installation method:



Can be cut



Don't peel all 3M tape at once.



Distortion(Wrong)


◆ Scenes to be used:



Indoor decorations



Outdoor Architecture

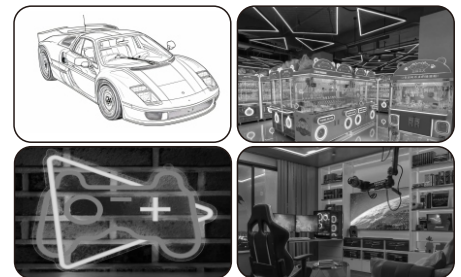


Modeling entertainment facilities, etc.


◆ Product packaging



Reel



Antistatic bag



Note: The parameters are subject to change without notice!

A1.25-02-22