


Cubic Inch Permanent Magnet Excited Series Sealed Electromagnetic Relay



JQX-6110M 1.5 Cubic Inch 6PDT Coil Transient Suppression Sealed Electromagnetic Relay
JQX-6010M 1.5 Cubic Inch 6PDT Sealed Electromagnetic Relay

Product introduction

- JQX-6110M equipped with coil transient suppression, JQX-6010M without coil transient suppression, both have identical external dimensions, but different ordering markings and corporate standards.
- Permanent magnet excitation balance force structure
- 1.5 Cubic inches
- Coil transient suppression
- 6 PDT
- Load current from 0.1A to 10A
- Anti vibration and shock
- Widely use can to transfer signal and lines in Aerospace and aviation fields
- Adopted military standard: MIL-PRF-83536G



General Characteristics

No.	Item	Performance
1	Cpmtact type	6Z
2	Dimesion	26mm×38mm×26mm(max)(1.5Cubic inches)
3	Weigh	≤ 120g
4	Leakage rate	≤ 1×10 ⁻³ Pa·cm ³ /s
5	Internal moisture content	≤ 5000 ppm

Load Characteristics

Load type	Contact Voltage					Life
	28Vd.c.	115Va.c. 400Hz Single phase	115Va.c. 50/60Hz Single phase	115/200Va.c. 400Hz Three phase	115/200Va.c. 50/60Hz Three phase	
Resistive load	10	10	2.5	10	2.5	10×10 ⁴
Inductive load	8	8	-	8	-	2×10 ⁴
Inductive load	-	-	2.5	-	2.5	1×10 ⁴
Motor load	4	4	2.0	4	2.0	10×10 ⁴
Lamp load	2	2	1.0	-	-	10×10 ⁴
Over load	Resistive:28 Vd.c.(0.2s±0.05s)			40 A		50 cycles
Limit	Resistive:28 Vd.c.(0.2s±0.05s)			50 A		50 cycles

JQX-6110M
JQX-6010M



Cubic Inch Permanent Magnet Excited Series Sealed Electromagnetic Relay

Environment Characteristics

No.	Item		Performance	
1	Environment grade		I	II
2	Temperature range(℃)		-65~+125	
3	Humidity		40℃ ±2℃ 90%~95%	
4	Low atmospheric range(kPa)		4.39	
5	Shock	Acceleration(m/s ²)	980	1960
		Pulse lasting time(ms)	6	6
6	Sin-Vibration	Frequency range(Hz)	10~2000	10~3000
		Acceleration root-mean-square values (m/s ²)	196	294
7	Random Vibration	Acceleration spectral density ((m/s ²) ² /Hz)	30	40
		Acceleration root-mean-square values (m/s ²)	207.1	239.1
8	Acceleration(m/s ²)		294	

Specifications

No.	Item		Performance
1	Coil consumption(W)		≤ 5.5
2	Contact resistance(Ω)	Initial Value	≤ 0.01
		After life	≤ 0.15
3	Operating time(ms)		≤ 15
4	Releasing time(ms)		≤ 15
5	Bounce time(ms)		≤ 1
6	Insulation resistance(MΩ) Test voltage:500V(1±10)d.c.	Under normal condition	≥ 100
		Under high temperature and high humidity and after life	≥ 50
7	Dielectric withstanding voltage Vr.m.s(50Hz)	Under normal condition	1000
		Under low atmospheric	250
8	Transiently suppressed coil back electromotive force (JQX-6110M)		≤ 42

Coil Characteristics

No.	Coil voltage		25℃			All temperature range	
	Nominal (Vd.c.)	Maximum (Vd.c.)	Coil Resistance (1±10%)Ω	Maximun operating voltage (Vd.c.)	Maximun release voltage (Vd.c.)	Maximun operating voltage (Vd.c.)	Minimun drop out voltage (Vd.c.)
028	28.0	32.0	160	15.5	2.00	20.0	1.50

■ Special coil types available upon to request.

Cubic Inch Permanent Magnet Excited Series Sealed Electromagnetic Relay






Order information

JQX-6110M - 028 3 4 I
① ② ③ ④ ⑤


- ① Type: JQX-6110M or JQX-6010M
- ② Part
- ③ Mounting code
- ④ Terminal
- ⑤ Environment level

JQX-6110M
JQX-6010M

Mounting types

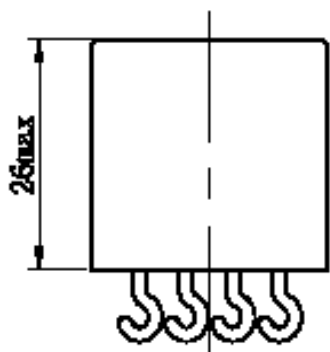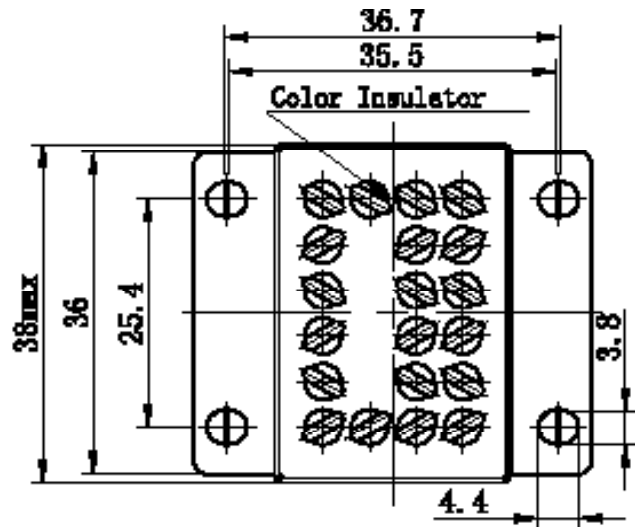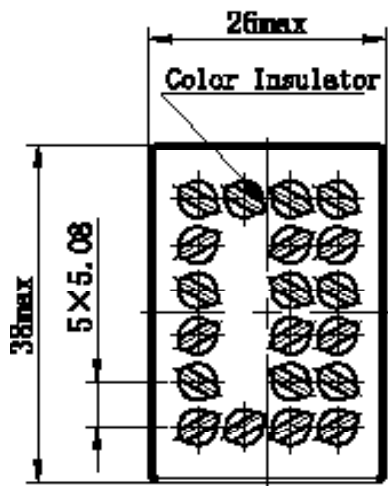




Mounting Code "0"

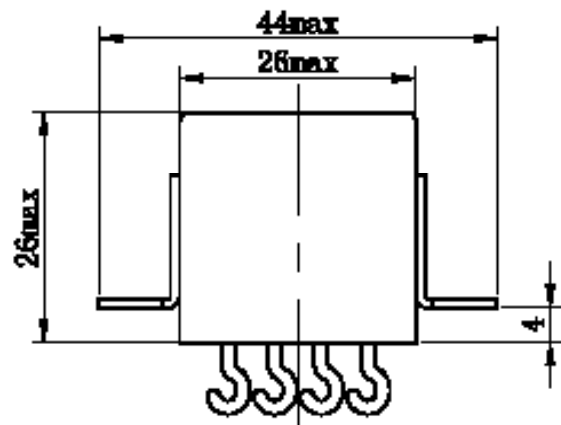


Mounting Code "2"



Cubic Inch Permanent Magnet Excited Series Sealed Electromagnetic Relay

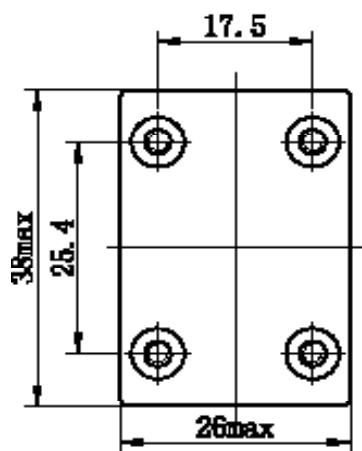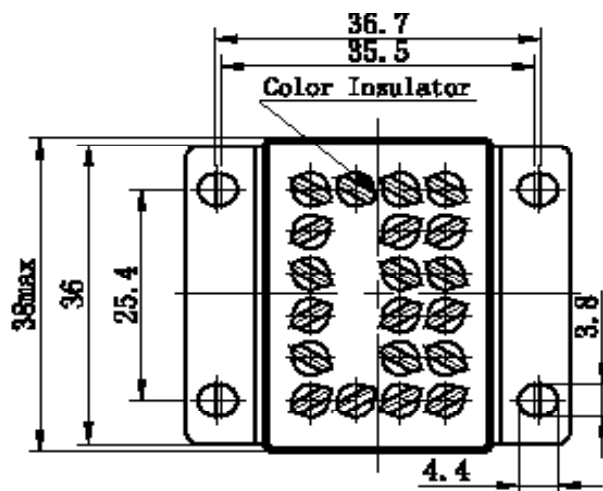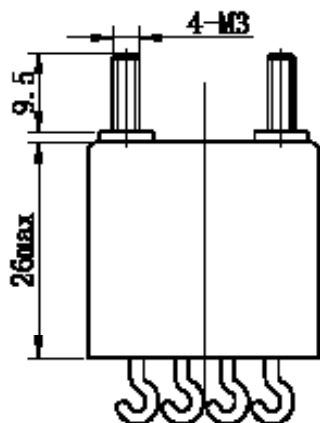


Mounting Code "4"

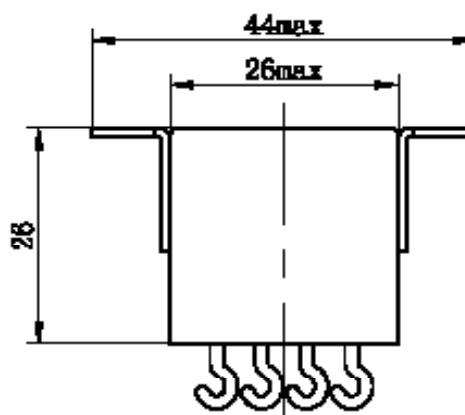


Mounting Code "8"

Terminal types

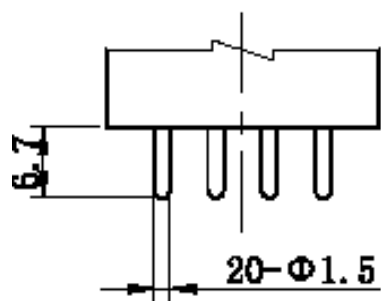


Pin Form "1"

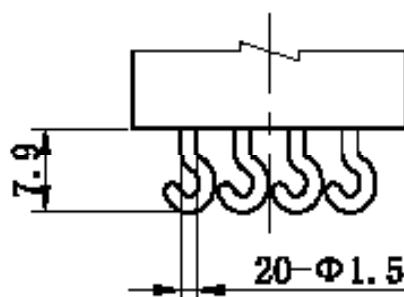


Pin Form "4"

Bottom View

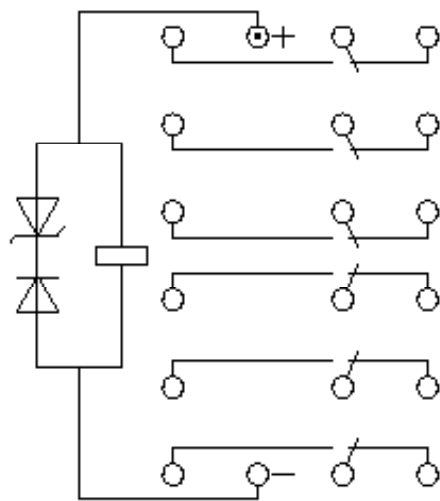

JQX-6110M

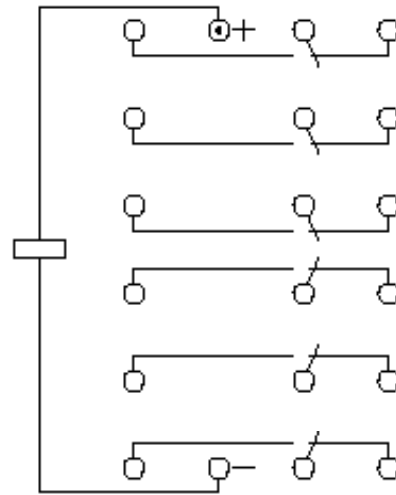

JQX-6010M