

DALICAP PRODUCT

High Q, RF/ Microwave Multilayer Ceramic Capacitor

Single Layer Chip Ceramic Capacitor

Multilayer Ceramic Capacitor

Broadband Ceramic Capacitor



Dalian Dalicap Technology Co., Ltd.

Address:

No. 21 Jinyue Street, Dongjiagou Sub-district,
Jinzhou District, Dalian, China.

Tel: +86 - 411- 87632359

Http: www.dalicap.com.cn

E-mail: dalicap@dalicap.com.cn





2022

ABOUT DALICAP

DALICAP TECH.

- ◆ Leading supplier of HiQ, RF/Microwave MLCC, especially in the fields of MRI, Telecom, semiconductor RF power, wireless broadcast, laser, testing and analyzing instruments, radar and aerospace etc.
- ◆ Years' experience in Telecom industry and working with clients in the time of 2G->3G->4G shift to 5G.
- ◆ With years of solid experience in the industry, including R&D, material, design, process and manufacturing
- ◆ Individual IP for new product development to insure the competence in the industry
- ◆ Standard HiQ/RF MLCC or customized(ask sales for more information)
- ◆ New production capacity to match the continuous increasing demand worldwide
- ◆ Global network technically and commercially to support clients

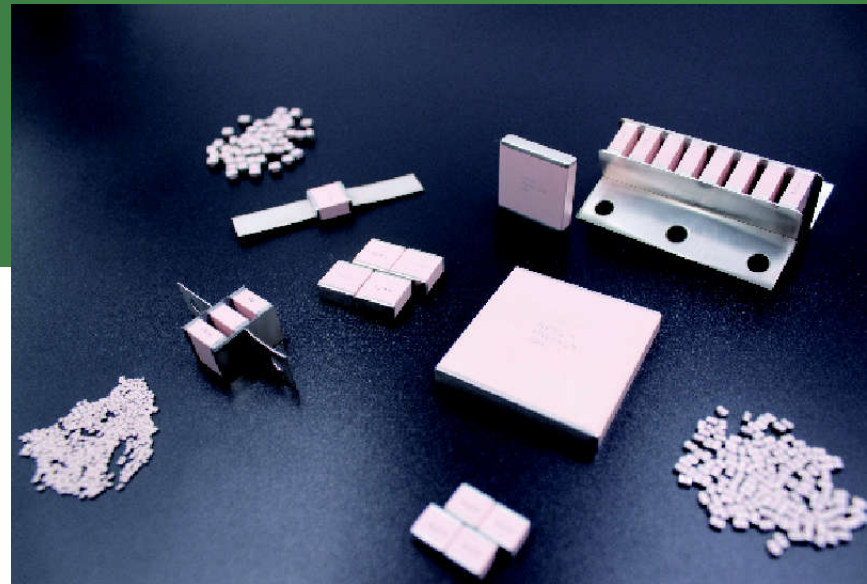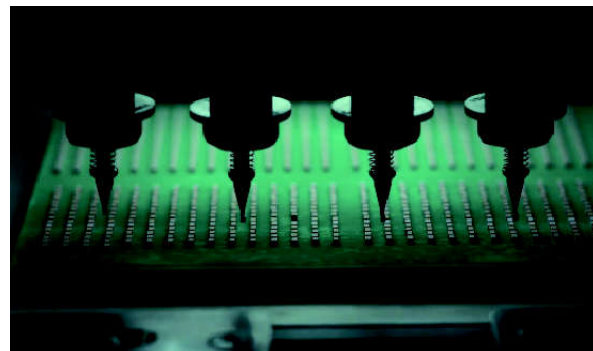

Dalicap attaches great importance to trusted worldwide customers, and has always been adhering to the concept of quality first and service first. As an important strategy of Dalicap, the company invested 50 Million USD and put into use a fully new high-end electronic component plant in 2021, with a total land area of 40,000 square meters and a total construction area of 56,000 square meters. It will achieve the capacity of 3 billion/Y microwave MLCC products. In addition to meeting the market demand for 5G telecommunication, it is also expected to make achievements in automotive electronics and other fields in the future.

The company will continue to adhere to the business philosophy of "focus on R&D, quality first" and do our best to create a brilliant future together with you.



ADVANTAGES OF DALICAP

R&D and Engineering Capability

During the phase of R&D, the electromagnetic field simulation technology is introduced and the Coaxial Resonance Line is applied on the measurement of Q value of MLCC. An individual RF testing system is used to simulate the working conditions of MLCC, so as to ensure the technical performance and continuous improvement.

Production Environment and Facilities

Standard 10K-class clean room and temperature control contribute to production process and quality stability. With advanced production facilities, Dalicap ensures the consistency of the output and product quality.

High frequency/RF technical Support

Dalicap has S parameter test fixtures, calibrated by TRL, to measure the S parameter of capacitors, by which S2P file would be initiated and available to customers. 34A Coaxial Resonance Line system is dedicated to measuring the ESR and Q value, which is the most effective method to monitor the performance in the industry. RF power testing system is built up for the measurement of the temperature rise under the working power, and breakdown voltage is also monitored. With years of solid experience in the industry, Dalicap provides customized products and technical support as well.


Quality Certification

ISO 9001 & ISO 14001 are certified.
RoHS is compliant.



CUSTOMERS OF DALICAP

With more than 1000 overseas customers distributed widely in the North America, Europe, Asian-Pacific and Autstralia, Dalicap gains a world wide reputation.

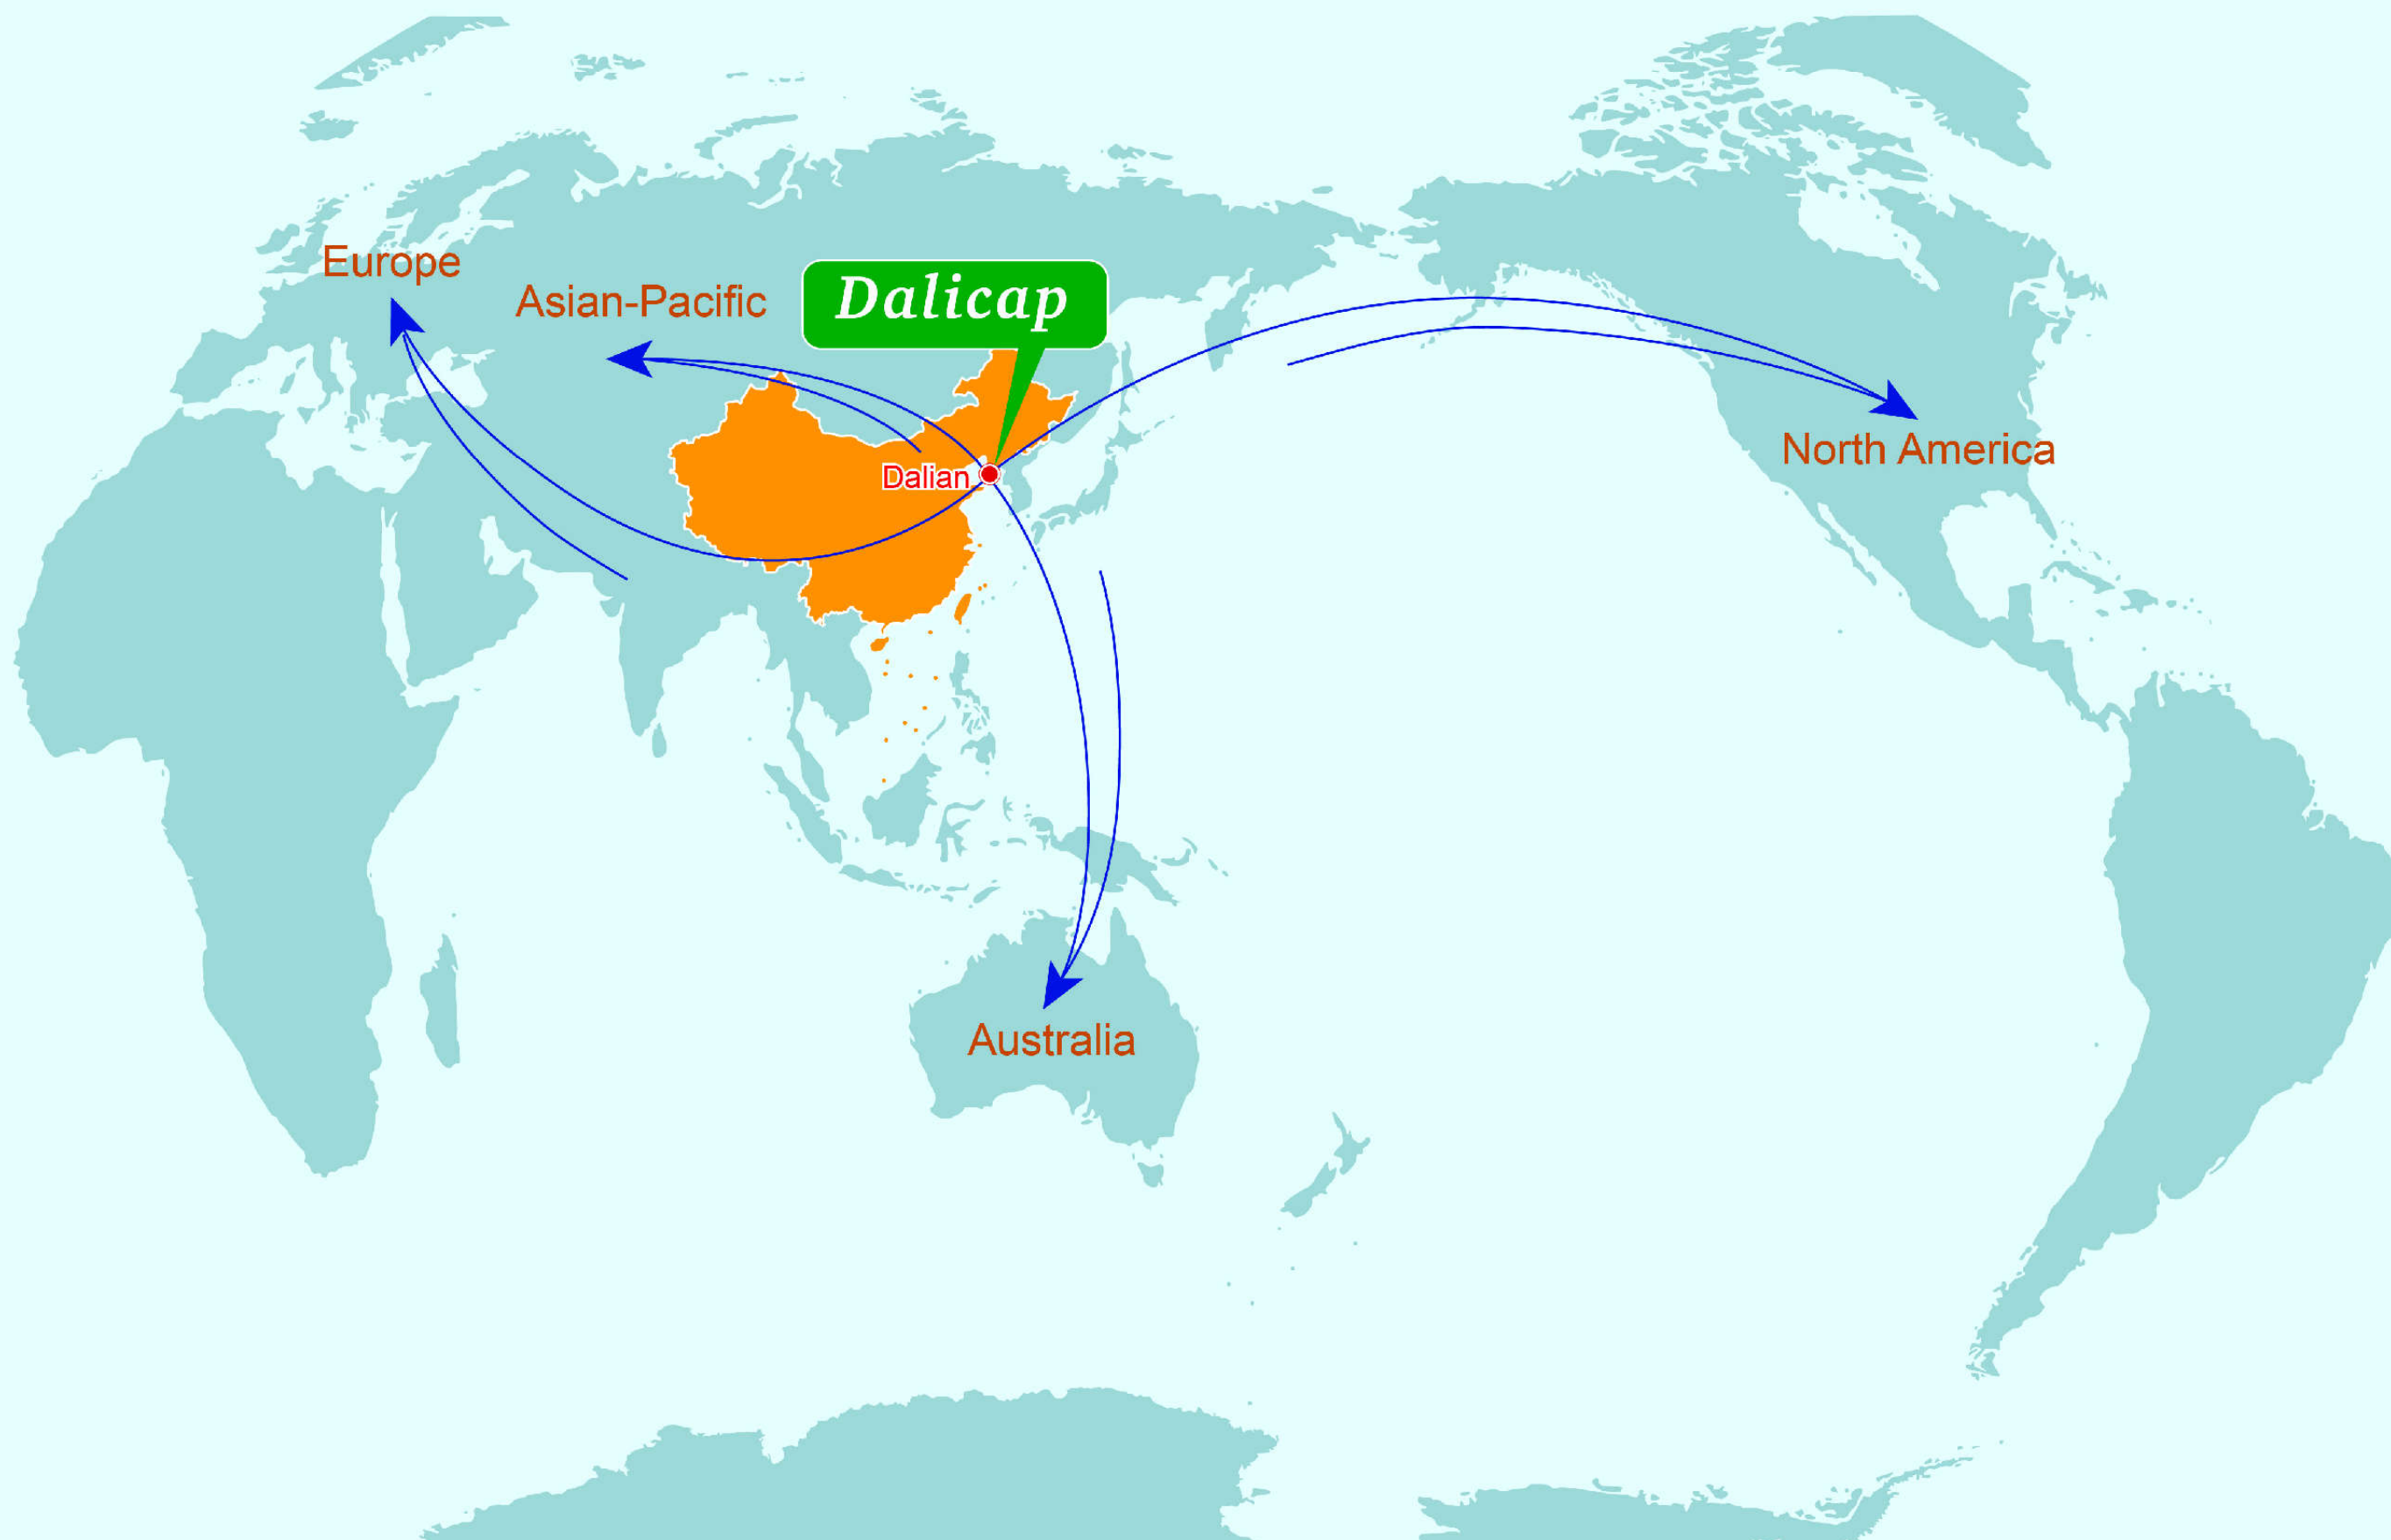


PRODUCT CONTENTS




**DLC70 Series
RF/Microwave Multilayer Chip Ceramic Capacitors** 01-07

Product Features
High Q, High RF Current/Voltage,High RF Power, Low ESR/ESL, Low Noise,
Ultra-Stable Performance.
SIZE: 0402, 0603, 0505, 0805, 1111, 2225, 3838



**DLC70 Series
High RF Power Multilayer Chip Ceramic Capacitors** 08-12

Product Features
High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise,
Ultra-Stable Performance.
SIZE: 6040, 7575, 130130




Capacitor Assemblies Offering 13-14

Product Features
High Q, High RF Current/Voltage,High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable
Performance,Custom-made.



DLC75 Series Ultra-Low ESR, RF/Microwave Ceramic Capacitors 15-20

Product Features
Ultra-Low ESR, High Working Voltage, High RF Power, High Self-Resonance Frequency.
SIZE: 0201, 0402, 0603, 0805, 0708, 1111



Broadband Ceramic Capacitors 21-22

Product Features
Small Size, Lower RF Impedance in Broadband, Low Insertion Losses, Low Reflection.
SIZE: 01005, 0201, 0402, 0805




General Purpose Non-Magnetic Multilayer Ceramic Capacitors 23-29

Product Features
Non-Magnetic, Suitable for MRI and other equipment requiring non-magnetic.
SIZE: 0603, 0805, 1206, 1210



Non-Magnetic Chip Resistors 30-34

Product Applications
MRI medical equipment, Measurement instrument, other non-magnetic applications.
SIZE: 0603, 0805, 1206



Single Layer Chip Ceramic Capacitor 35-48

Product Applications
Suitable for RF/Microwave phased array radar T/R assembly, and filter, DC blocking
and bypass at microwave frequencies.



DLC70 Series RF/Microwave Multilayer Chip Ceramic Capacitors


◆ Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.
Lead capacitors' surface are coated with special coating, which can prevent arc and corona from occurring at high RF voltages.

◆ Product Applications

Typical Circuit Applications: High Frequency/Microwave/ RF Amplifiers, Low Noise Amplifiers, L/C Filters.
Typical Applications Field: Mobile Base Stations, Repeaters, Wireless Broadcasting Equipments, Radio Stations, Radar, MRI Equipments, HSR Signal Transponders.

◆ Part Numbering

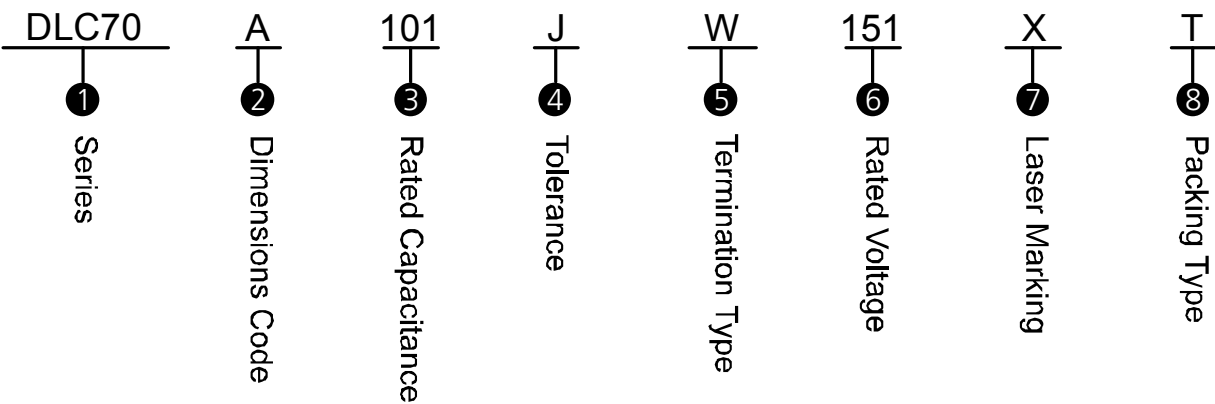

① **Series:** Dalicap 70 Series High Q High Power Capacitor, Temperature Coefficient: $0 \pm 30\text{ppm}/^\circ\text{C}$.

② Dimensions Code

	DLC70H	DLC70P	DLC70A	DLC70D
Length	.039 ± .004 (1.00 ± 0.10)	.063 ± .006 (1.60 ± 0.15)	.055(+.015~-.010) (1.40+0.38~-0.25)	.079 ± .008 (2.00 ± 0.20)
width	.020 ± .004(0.50 ± 0.10)	.031 ± .006(0.80 ± 0.15)	.055 ± .010(1.40 ± 0.25)	.049 ± .008(1.25 ± 0.20)
Thickness	.020 ± .004(0.50 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.057(1.45)max	.057(1.45)max

unit:inch(millimeter)

	DLC70B	DLC70C	DLC70E
Length	.110(+.020~-.010) (2.79+0.51~-0.25)	.225(+.020~-.010) (5.72+0.51~-0.25)	.380(+.015~-.010) (9.65+0.38~-0.25)
width	.110 ± .010(2.79 ± 0.25)	.250 ± .015(6.35 ± 0.38)	.380 ± .010(9.65 ± 0.25)
Thickness	.100(2.54)max	.150(3.81)max	.170(4.32)max

③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.
Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

④ Tolerance

Code	A	B	C	D	F	G	J
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%

⑤ Termination Type

Code	W	P	L
Type	100% Sn Solder over Nickel Plating	100% Sn Solder over Copper Plating (RoHS Compliant)	90% Sn 10% Pb Solder over Nickel Plating (Tin/Lead)

Code	MS	AR	RR	AW	RW
Type	Microstrip	Axial Ribbon	Radial Ribbon	Axial Wire	Radial Wire

Code	MN	AN	FN	BN	RN
Type	Non-mag Microstrip	Non-mag Axial Ribbon	Non-mag Radial Ribbon	Non-mag Axial Wire	Non-mag Radial Wire

⑥ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)	Code	Rated Voltage(V)
500	50	301	300	252	2500
101	100	501	500	302	3000
151	150	601	600	362	3600
201	200	102	1000	722	7200
251	250	152	1500		

⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.
Capacitance greater than 10pF; for example: the marking of 100pF is 101.

⑧ Packaging Type

	70H	70P	70D	70A	70B	70C	70E
T: Horizontal Taping	✓	✓	✓	✓	✓	✓	✓
TV: Vertical Taping		✓	✓	✓	✓	✓	
B: Plastic Bag				✓	✓		
C: Waffle Box						✓	✓

◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.







◆ Capacitance & Rated Voltage Table

Rated WVDC Cap.pF		Size(inch)															
		DLC70H (0402)		DLC70P (0603)		DLC70A (0505)		DLC70D (0805)		DLC70R (0710)		DLC70B (1111)		DLC70C (2225)		DLC70E (3838)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
0.1	0R1	A, B, C, D.	200V Code 201	A, B, C, D.								A, B, C, D.					
0.2	0R2																
0.3	0R3																
0.4	0R4																
0.5	0R5																
0.6	0R6																
0.7	0R7																
0.8	0R8																
0.9	0R9																
1.0	1R0																
1.1	1R1																
1.2	1R2																
1.3	1R3																
1.4	1R4																
1.5	1R5																
1.6	1R6																
1.7	1R7																
1.8	1R8																
1.9	1R9																
2.0	2R0																
2.1	2R1																
2.2	2R2																
2.4	2R4																
2.7	2R7																
3.0	3R0																
3.3	3R3																
3.6	3R6																
3.9	3R9																
4.3	4R3																
4.7	4R7																
5.1	5R1																
5.6	5R6																
6.2	6R2																
6.8	6R8																
7.5	7R5																
8.2	8R2																
9.1	9R1																
10	100	F, G, J.	50V Code 500	F, G, J.								F, G, J.					
11	110																
12	120																
13	130																
15	150																
16	160																
18	180																
20	200																
22	220																
24	240																
27	270																
30	300																
33	330																
36	360																
39	390																
43	430																
47	470																

◆ Capacitance & Rated Voltage Table

[illegible]

◆ **DLC70 Lead Type and Dimensions**

W/L/P	MS/MN	AR/AN
		
RR/FN	RW/RN	AW/BN
		

unit: inch(millimeter)

Series	Term. Code	Capacitor Dimensions				Lead Dimensions			Plated Material
		Length (Lc)	Width (Wc)	Thick. (Tc)	Overlap (B)	Length (Ll)	Width (Wl)	Thickness (Tl)	
DLC70B	MS/MN	.135 ± .015 (3.43 ± 0.38)	.110 ± .010 (2.79 ± 0.25)	.100 (2.54)max	.016 ~ .039 (0.40 ~ 1.00)	.250 (6.35)min	.093 ± .005 (2.36 ± 0.13)	.004 ± .001 (0.10 ± .025)	100 % Ag
DLC70C	MS/MN AR/AN	.245 ± .025 (6.22 ± 0.64)	.250 ± .015 (6.35 ± 0.38)	.165 (4.19) max	.020 ~ .047 (0.50 ~ 1.20)	.500 (12.70) min	.240 ± .005 (6.10 ± 0.13)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RR/FN					.354 (9.00) min	.118 ± .005 (3.00 ± 0.13)	.012 ± .001 (0.30 ± 0.025)	Silver-plated Copper
	RW/RN					.709 (18.00) min	Dia.=.031±.004 (0.80±0.10)		
	AW/BN					.906 (23.00) min			
DLC70E	MS/MN	.380 +.015 ~ -.010 (9.65 +0.38 ~ -0.25)	.380 ± .010 (9.65 ± 0.25)	.177 (4.50)max	.024 ~ .059 (0.60 ~ 1.50)	.728 (18.50) min	.350 ± .020 (8.89 ± 0.50)	.008 ± .001 (0.20 ± .025)	Silver-plated Copper
	AR/AN						.315 ± .010 (8.00 ± 0.25)		
	RR/FN					.354 (9.00) min	.118 ± .005 (3.00 ± 0.13)	.012 ± .001 (0.30 ± 0.025)	Silver-plated Copper
	RW/RN					.709 (18.00) min	Dia.=.031±.004 (0.80±0.10)		
	AW/BN					.906 (23.00) min			

◆ **Performance**

Item	Specifications
Quality Factor (Q)	Greater than 10,000 at 1 ± 0.1 MHz.
Insulation Resistance (IR)	Test Voltage: Applied Rated Voltage, and 500V maximum. 10 ⁵ Megohms min. @ +25 °C at rated WVDC. 10 ⁴ Megohms min. @ +125 °C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of Rated Voltage for 5 seconds, Rated Voltage ≤ 500VDC 150% of Rated Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage for 5 seconds, Rated Voltage > 1250VDC
Operating Temperature Range	-55 °C ~ +125 °C (70B 0.1pF ~ 1000pF can reach to -55 °C ~ +175 °C) Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	0 ± 30 ppm/°C; (-55 °C ~ +175 °C, 0 ± 60 ppm/°C)
Capacitance Drift	± 0.2% or ± 0.05pF, whichever is greater.
Piezoelectric Effects	None
Termination Type	See Termination Type Table

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.


◆ **Environmental Tests**

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85 °C with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125 °C. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC


◆Tape & Reel Specifications

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0505-H	1.50	1.75	1.15	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0505-H	1.40	1.80	0.95	8.00	4.00	4.00	0.25	3.50	500	3000	Plastic
0505-H	1.50	1.75	1.30	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0505-V	1.10	1.60	1.40	8.00	4.00	4.00	0.30	3.50	500	1000	Plastic
1111-H	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-H	2.85	3.60	2.40	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-V	2.30	3.55	2.70	12.00	4.00	4.00	0.40	5.50	500	1500	Plastic
2225-H	6.70	6.20	3.40	16.00	4.00	12.00	0.30	7.50	100	500	Plastic
2225-V	4.10	6.15	6.55	16.00	4.00	8.00	0.40	7.50	100	300	Plastic
3838-H	10.10	10.10	3.30	16.00	4.00	16.00	0.30	7.50	50	300	Plastic
3838-H	10.10	10.10	4.30	16.00	4.00	16.00	0.40	7.50	50	200	Plastic

Horizontal Orientation

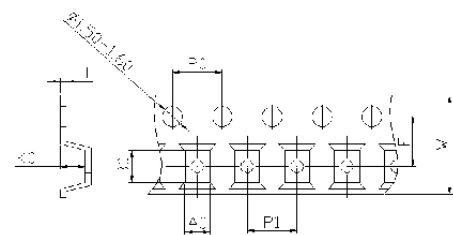

Vertical Orientation

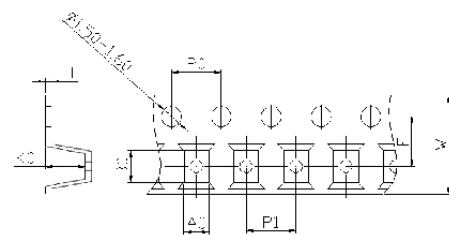

DLC70 Series High RF Power Multilayer Chip Ceramic Capacitors


◆Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.

◆Product Applications

High RF Power Amplifiers, High Power Filter Networks, Wireless Demodulation.

◆Part Numbering

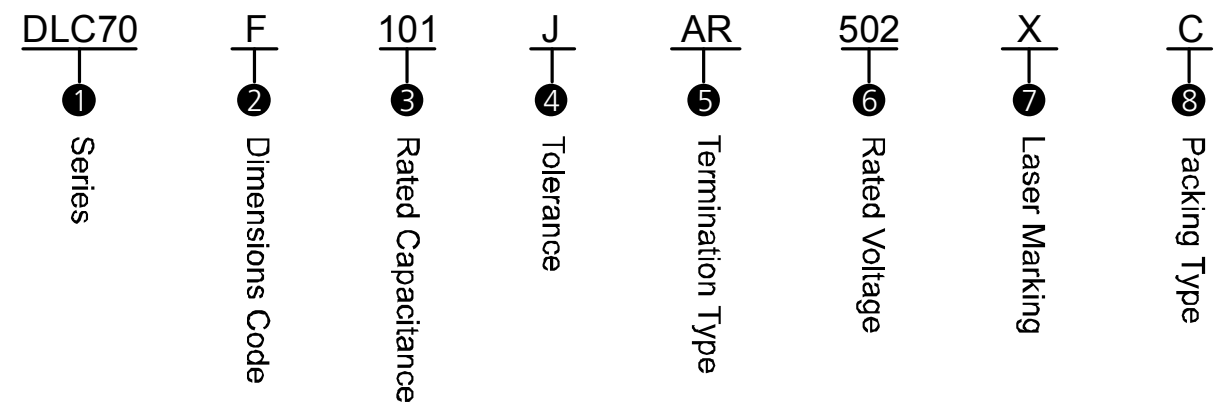

① **Series:** Dalicap 70 Series High RF Power Capacitor, Temperature Coefficient: $0 \pm 30\text{ppm}/^\circ\text{C}$.

② Dimensions Code

unit:inch(millimeter)

	DLC70F	DLC70G	DLC70L
Length	.614(+.015~-.010) (15.60+0.38~-0.25)	.760(+.015~-.010) (19.30+0.38~-0.25)	1.30(+.015~-.010) (33.02+0.38~-0.25)
width	.433 $\pm$.010(11.0 $\pm$ 0.25)	.760 $\pm$.010(19.30 $\pm$ 0.25)	1.30 $\pm$.010(33.02 $\pm$ 0.25)
Thickness	.197(5.00)max	.197(5.00)max	.197(5.00)max

③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denotes decimal point.

Capacitance is not less than 10pF; for example: 101=100pF, the third number is the power of 10.

④ Tolerance

Code	B	C	D	F	G	J
Tolerance	$\pm 0.1\text{pF}$	$\pm 0.25\text{pF}$	$\pm 0.5\text{pF}$	$\pm 1\%$	$\pm 2\%$	$\pm 5\%$

⑤ Termination Type

Code	W	P	L
Type	100% Sn Solder over Nickel Plating	100% Sn Solder over Copper Plating (RoHS Compliant)	90% Sn 10% Pb Solder over Nickel Plating (Tin/Lead)

⑤ Termination Type

Code	MS	AR	AW	RW
Type	Microstrip	Axial Ribbon	Axial Wire	Radial Wire

Code	MN	AN	BN	RN
Type	Non-mag Microstrip	Non-mag Axial Ribbon	Non-mag Axial Wire	Non-mag Radial Wire

⑥ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
301	300	302	3000
501	500	362	3600
102	1000	502	5000
152	1500	802	8000
202	2000	103	10000
252	2500		

⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.
 Capacitance is not less than 10pF; for example: the marking of 100pF is 101.

⑧ Packaging Type

	70F	70G	70L
C: Waffle Tray packaging	✓	✓	✓
I: Special packaging	Consult with DALICAP		

◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.









◆ Capacitance & Rated Voltage Table

Rated WVDC Cap.		Size(inch)					
		DLC70F (6040)		DLC70G (7575)		DLC70L (130130)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
1.0	1R0						
1.2	1R2						
1.5	1R5						
1.6	1R6						
1.8	1R8						
2.2	2R2						
2.7	2R7						
3.3	3R3						
3.6	3R6						
3.9	3R9						
4.7	4R7						
5.6	5R6						
6.8	6R8						
8.2	8R2						
10	100						
12	120						
15	150						
18	180						
22	220						
27	270						
33	330						
39	390						
47	470						
56	560						
68	680						
82	820						
100	101						
120	121						
150	151						
180	181						
200	201						
220	221						
270	271						
300	301						
330	331						
390	391						
470	471						
560	561						
680	681						
820	821						
1000	102						
1200	122						
1500	152						
1800	182						
2200	222						

Rated WVDC Cap.		Size(inch)					
		DLC70F (6040)		DLC70G (7575)		DLC70L (130130)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
2700	272						
3300	332						
4700	472						
5100	512						
5600	562						
6800	682						
7500	752						
8200	822						
10000	103						
12000	123						
15000	153						
18000	183						
20000	203						
22000	223						
33000	333						
47000	473						
56000	563						
68000	683						
82000	823						
100000	104						
120000	124						

◆ DLC70 Lead Type and Dimensions

W/L/P	MS/MN	AR/AN
		
FN	RW/RN	AW/BN
		

unit: inch(millimeter)

Series	Term. Code	Capacitor Dimensions				Lead Dimensions			Plated Material
		Length (Lc)	Width (Wc)	Thick. (Tc)	Overlap (B)	Length (Ll)	Width (Wl)	Thickness (Tl)	
DLC70F	MS/MN AR/AN	.614 +.015~- .010 (15.60 +0.38~-0.25)	.433 ± .010 (11.00 ± 0.25)	.197 (5.00) max	.024~.059 (0.60~1.50)	.748 (19.00) min	.350 ± .010 (8.89 ± 0.25)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RW/RN					.748 (19.00) min			
	AW/BN					.906 (23.00) min			
DLC70G	MS/MN AR/AN	.760 +.015~- .010 (19.30 +0.38~-0.25)	.760 ± .010 (19.30 ± 0.25)	.197 (5.00) max	.024~.059 (0.60~1.50)	.748 (19.00) min	.591 ± .010 (15.00 ± 0.25)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RW/RN					.748 (19.00) min			
	AW/BN					.906 (23.00) min			
DLC70L	MN/AN	1.300 +.015~- .010 (33.02 +0.38~-0.25)	1.300 ± .010 (33.02 ± 0.25)	.197 (5.00) max	.039~.071 (1.00~1.80)	.748 (19.00) min	1.299 ± .020 (33.00 ± 0.50)	.012 ± .001 (0.30 ± 0.025)	Silver-plated Copper
	FN					.669 (17.00) min	.157 ± .008 (4.00 ± 0.20)	.012 ± .001 (0.30 ± 0.025)	

◆ Performance

Item	Specifications
Quality Factor (Q)	less than 1000pF, Q value more than 2000, Test frequency 1MHz; More than 1000pF, Q value more than 2000, Test frequency 1KHz;
Insulation Resistance (IR)	Test Voltage: 500V 10 ⁵ Megohms min. @ +25℃ at rated WVDC. 10 ⁴ Megohms min. @ +125℃ at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of Rated Voltage for 5 seconds, Rated Voltage ≤ 500VDC 150% of Rated Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage for 5 seconds, Rated Voltage > 1250VDC
Operating Temperature Range	-55℃ to +125℃ Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	0 ± 30 ppm/℃
Capacitance Drift	± 0.2% or ± 0.05pF, whichever is greater.
Piezoelectric Effects	None

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

◆ Environmental Tests

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85℃ with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125℃. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC

Capacitor Assemblies Offering

◆ Product Features

High Operating Voltage, High Operating Current, Extended Capacitance, Tighter Tolerances,
High Reliability, High Q, Ultra-low ESR, Non-Magnetic.

◆ Typical Applications Field

High Power RF, Medical Electronics, Broadcast, Semiconductor Manufacturing,
High Magnetic Environments, Inductive Heating.

◆ Part Numbering

DLC	V	6	7	N	C	101	F	252	X	(G)
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
DALICAP	Z: Series/ Y: Series/ V: Parallel	Number Capacitors	Termination Type 5: Match 6: Silver 7: Copper 8: silver plated copper strip	Cap. Type N:DLC70	Cap. Size B:1111 C:2225 E:3838 F:6040 G:7676 L:130130	Capacitance	Tolerance	Rated Voltage	Laser Marking	G: Molding; C: Coating; Null: No any coating

Capacitance: For capacitor values requiring 3 significant digits,

e.g. 1222.5pF =1222R5

e.g. DLCV66NC101F252X

Silver bracket assembly with six DLC70 pieces in parallel, Capacitance is 100pF,

Capacitance tolerance is $\pm 1\%$, WVDC is 2500 V and Laser marking.

e.g. DLCY26NG1222R5G203X

Silver bracket assembly with two DLC70 pieces in series, Capacitance is 1222.5pF,

Capacitance tolerance is $\pm 2\%$, WVDC is 20,000V and Laser marking.

◆ Capacitance and Voltage


By Buyer's requirements using existing drawings, mechanical sketches, or we can help with capable modeling of assemblies thermal rise predictions.

◆ Typical Assembly Configurations

① Parallel Assemblies

unit: inch(millimeter)

	70B	70C	70E	70F	70G
Lead Material	Silver-plated Copper or silver				
Lead Thickness	.004 or .010 (0.1 or 0.25)		.010 or .020 (0.25 or 0.51)		
Lead Length (max.)	.50 (12.7)	.75 (19.1)	2.0 (50.8)		
Capacitor Spacer (typ.)	.050 to .078 (1.3 to 2)		.06 to .10 (1.5 to 2.5)	.078 to .197 (2.0 to 5.0)	
Mtg Configuration	Horizontal/Vertical				

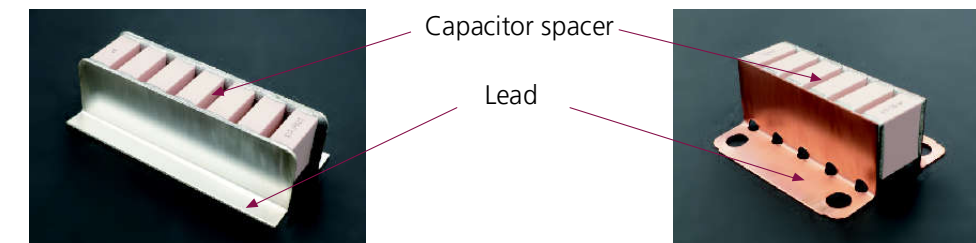

② Series Assemblies

unit: inch(millimeter)

	70C	70E	70F	70G
Lead Type	L-Bracket			
Lead Material	Silver-plated Copper or silver			
Lead Thickness	.010 (0.25)	.010 or .020 (0.25 or 0.51)		
Lead Length (max.)	.75 (19.1)	1.0 (25.4)		
Capacitor Spacer (typ.)	0 to .157 (0 to 4)			
Mtg Configuration	Horizontal			

③ Epoxy Molding



④ Other Assemblies By Buyer's requirement

DLC75 Series Ultra-Low ESR, RF/Microwave Ceramic Capacitors

◆ Product Features

Ultra-Low ESR, High Working Voltage, High RF Power,
High Self-Resonance Frequency.




◆ Product Applications

Typical Circuit Applications: High Power Filter Networks, Mixers, Couplers, Matching Networks, Output Coupling, Antenna Coupling, DC blocking, Bypass.

Typical Applications Field: VHA/UHF/Microwave Communication Systems, Mobile Base Stations, Repeaters, Wireless Broadcasting Equipments, Radio Stations, Radar, WiMAX, Satellite Communications.

◆ Part Numbering

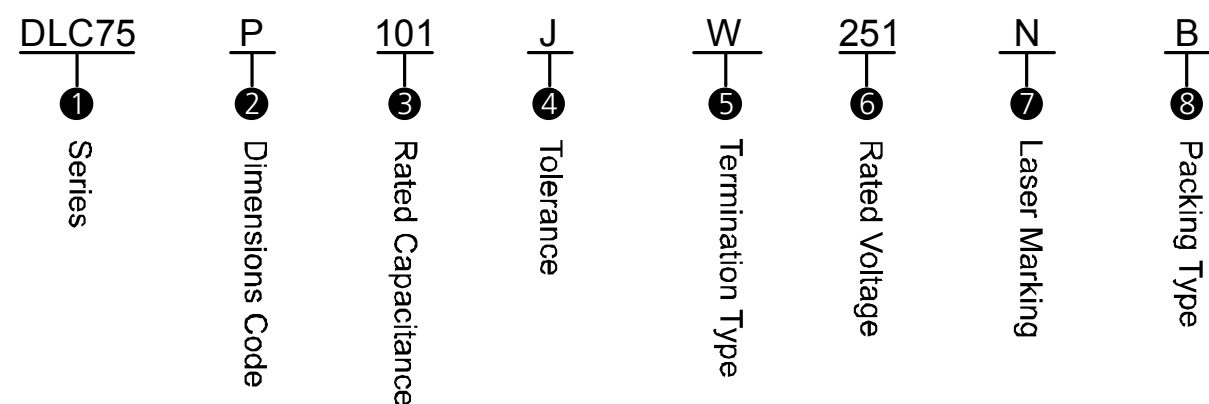

① **Series:** Dalicap 75 Series Low ESR Microwave Capacitor, Temperature Coefficient: $0 \pm 30 \text{ ppm}/^\circ\text{C}$.

② Dimensions Code

unit: inch (millimeter)

	DLC75N	DLC75H	DLC75P	DLC75D	DLC75B	DLC75R
Length	.024 ± .001 (0.60 ± 0.03)	.040 ± .004 (1.02 ± 0.10)	.063 ± .006 (1.60 ± 0.15)	.078 ± .010 (2.00 ± 0.25)	.110(+.020~-.010) (2.79+0.51~-0.25)	.070 ± .006 (1.78 ± 0.15)
width	.012 ± .001 (0.30 ± 0.03)	.020 ± .004 (0.51 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.049 ± .010 (1.20 ± 0.25)	.110 ± .010 (2.79 ± 0.25)	.080 ± .006 (2.03 ± 0.15)
Thickness	.012 ± .001 (0.30 ± 0.03)	.020 ± .004 (0.51 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.057(1.45)max	.102(2.60)max	.120(3.04)max

③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.

Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

④ Tolerance

Code	A	B	C	D	F	G	J
Tolerance	±0.05pF	±0.1pF	±0.25pF	±0.5pF	±1%	±2%	±5%

⑤ Termination Type

Code	W
Type	Nickel, Plated 100% Sn(RoHS)

⑥ Rated Voltage

Code	Rated Voltage(V)
250	25
500	50
251	250
501	500

⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.

Capacitance is not less than 10pF; for example: the marking of 100pF is 101.

N denotes no marking.

⑧ Packaging Type

	75N	75H	75P	75D	75B	75R
T: Horizontal Taping	✓	✓	✓	✓	✓	✓
B: Bulk packaging in a bag			✓	✓	✓	✓
TV: Vertical Taping				✓	✓	

◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

◆ All products are in compliance with RoHS instruction.



◆Capacitance & Rated Voltage Table

Rated WVDC Cap.pF		Size(inch)									
		DLC75N (0201)		DLC75H (0402)		DLC75P (0603)		DLC75D (0805)		DLC75R (0708)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
0.1	0R1										
0.2	0R2										
0.3	0R3										
0.4	0R4										
0.5	0R5										
0.6	0R6										
0.7	0R7										
0.8	0R8										
0.9	0R9										
1.0	1R0										
1.1	1R1										
1.2	1R2										
1.3	1R3										
1.4	1R4										
1.5	1R5	A, B, C, D.	25V Code 250	A, B, C, D.	50V Code 500 200V or 201 250V Code 251	A, B, C, D.	A, B, C, D.				
1.6	1R6										
1.7	1R7										
1.8	1R8										
1.9	1R9										
2.0	2R0										
2.1	2R1										
2.2	2R2										
2.4	2R4										
2.7	2R7										
3.0	3R0										
3.3	3R3										
3.6	3R6										
3.9	3R9										
4.3	4R3										
4.7	4R7										
5.1	5R1										
5.6	5R6										
6.2	6R2										
6.8	6R8										
7.5	7R5										
8.2	8R2										
9.1	9R1										
10	100										
11	110										
12	120										
13	130										
15	150										
16	160										
18	180										
20	200										
22	220										
24	240										
27	270										
30	300										
33	330										
36	360										
39	390										
43	430										
47	470										

◆Capacitance & Rated Voltage Table

Rated WVDC Cap.pF		Size(inch)									
		DLC75N (0201)		DLC75H (0402)		DLC75P (0603)		DLC75D (0805)		DLC75R (0708)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
51	510										
56	560										
62	620										
68	680										
75	750										
82	820										
91	910										
100	101										
110	111										
120	121										
130	131										
150	151										
160	161										
180	181										
200	201										
220	221										
240	241										
270	271										
300	301										
330	331										
360	361										
390	391										
430	431										
470	471										
510	511										
560	561										
620	621										
680	681										
750	751										
820	821										
910	911										
1000	102										

◆ **Performance**

Item	Specifications
Quality Factor (Q)	Greater than 2,000 at 1 ± 0.1MHz
Insulation Resistance (IR)	10 ⁵ Megohms min. @ +25 °C at rated WVDC. 10 ⁴ Megohms min. @ +125 °C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of rated voltage for 5 seconds.
Operating Temperature Range	−55 °C to +150 °C Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	0 ± 30ppm/°C
Capacitance Drift	± 0.2% or ± 0.05pF, whichever is greater.
Piezoelectric Effects	None


◆ **Environmental Tests**

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85 °C with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125 °C. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC



◆ **Tape & Reel Specifications**

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0201-H	0.40	0.70	-	8.00	4.00	2.00	0.42	3.50	1000	15000	Paper
0402-H	0.70	1.20	-	8.00	4.00	2.00	0.65	3.50	1000	10000	Paper
0603-H	1.05	1.80	-	8.00	4.00	4.00	0.95	3.50	500	4000	Paper
0708-H	1.90	2.65	2.20	8.00	4.00	4.00	0.25	3.50	500	1000	Plastic
0805-H	1.45	2.30	0.95	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0805-H	1.37	2.20	1.20	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0805-V	1.35	2.25	1.35	8.00	4.00	4.00	0.22	3.50	500	1000	Plastic
1111-H	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-H	2.85	3.60	2.40	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-V	2.30	3.55	2.70	12.00	4.00	4.00	0.40	5.50	500	1500	Plastic

Horizontal Orientation

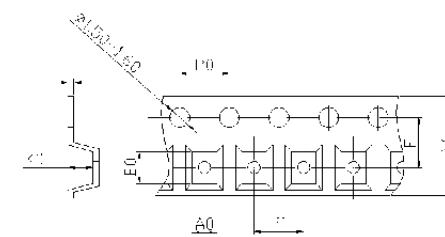

Vertical Orientation

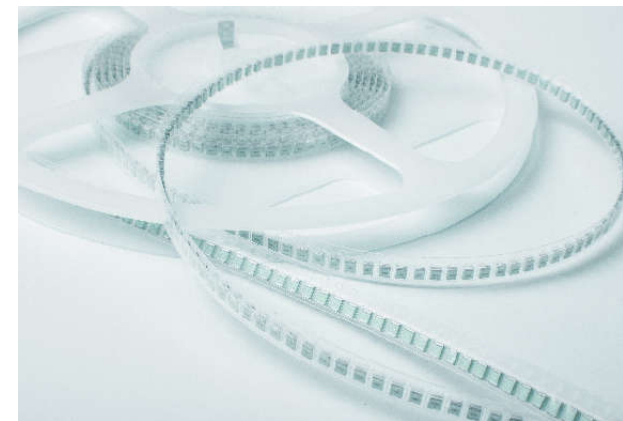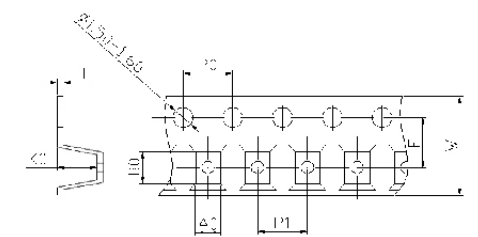


Broadband Ceramic Capacitors

Product Features

Series	Typical operating frequency range	Insertion Loss	Plated Material	Packaging Type
(.010" × .005")01005BB104MW4R0	16KHz(-3dB) to >67GHz	<1dB,typical		40K pcs/reel, lower quantities in cut tape
(.020" × .010")0201BB104KW160	16KHz(-3dB) to >40GHz	<1dB,typical	Au/Sn (RoHS)	15K pcs/reel, lower quantities in cut tape
(.020" × .010")0201BB103KW250	16KHz(-3dB) to >32GHz	<1dB,typical		
(.040" × .020")0402BB103KW500	16KHz(-3dB) to 40GHz	<1dB,typical	Au/Sn (RoHS)	10K pcs/reel, lower quantities in cut tape
(.040" × .020")0402BB104KW500	16KHz(-3dB) to 50GHz	<1.2dB,typical		
(.080" × .050")0805BB103KW101	16KHz(-3dB) to 3GHz	<0.25dB,typical	Ni/Sn(RoHS)	

Mechanical Dimensions


unit:inch(millimeter)

Outlines	Code	Capacitor Dimensions			
		Length (L)	Width (W)	Thick. (T)	(S)
	01005	.016 ± .001 (0.40 ± 0.03)	.008 ± .001 (0.20 ± 0.03)	.008 ± .001 (0.20 ± 0.03)	.005(0.13)min
	0201	.023 ± .001 (0.58 ± 0.03)	.012 ± .001 (0.30 ± 0.03)	.0118(0.30)max	.0078(0.20)min
	0402	.040 ± .004 (1.016 ± 0.102)	.020 ± .004 (0.508 ± 0.102)	.024(0.61)max	.016(0.406)min
	0805	.080 ± .006 (2.03 ± 0.15)	.050 ± .006 (1.27 ± 0.15)	.040(1.02)max	.044(1.12)min

Electrical Specifications

Item	Series					
Rated Voltage	01005BB104 MW4R0	0201BB104 KW160	0201BB103 KW250	0402BB103 KW500	0402BB104 KW500	0805BB103 KW101
	4WVDC	16WVDC	25WVDC	50WVDC	50WVDC	100WVDC
Capacitance	100nF	100nF	10nF	10nF	100nF	10nF
Operating Temperature Range.	-55°C to +85°C					
Insulation Resistance (IR)	10 ¹¹ Ω min. @ +25°C @ rated WVDC					
Dielectric Withstanding Voltage (DWV)	250% of rated voltage for 5 seconds.					
Temperature Coefficient (TC)	± 15%					

Part Numbering

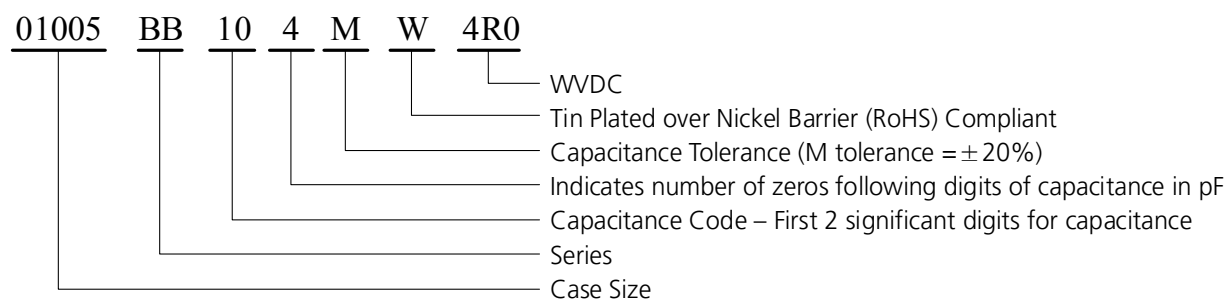

Introduction

There are a number of circuits that require coupling RF signals or bypassing them to ground while blocking DC over extraordinarily large RF bandwidths. The applications for which they are intended typically require small, surface-mountable (SMT) units with low insertion losses, reflections, and impedances across RF frequencies extending from the tens of KHz to the tens of GHz. and temperatures typically ranging from -55 to +85°C. This note focuses on a particular implementation of these devices -- multilayer ceramic capacitors (MLCCs)- and how to obtain the best performance when they're used on various substrates.

Broadband capacitors are used in the "signal integrity" market -- optoelectronics/high-speed data; ROSA/TOSA (Transmit/Receive optical subassemblies); SONET (Synchronous Optical Networks); broadband test equipment - as well as in broadband microwave and millimeter wave amplifiers (MMICs, GaN transistors) and oscillators. The basic requirement in the former is to produce an output waveform that closely replicates an input waveform, typically a train of digital pulses, as shown in Fig.1.


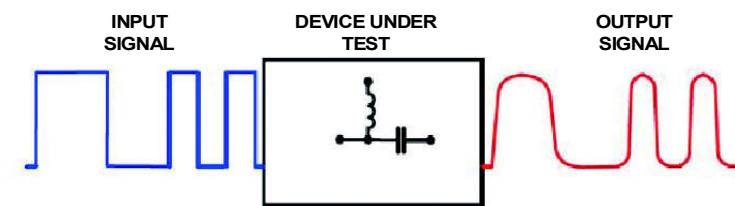


Fig.1"Signal Integrity"- output replication of input

While RF and microwave devices are typically measured in the frequency domain, digital systems are usually characterized in the time domain, and so it is necessary to make a connection between the two (Fig.2).

FREQUENCY DOMAIN

- Insertion loss
- Reflection

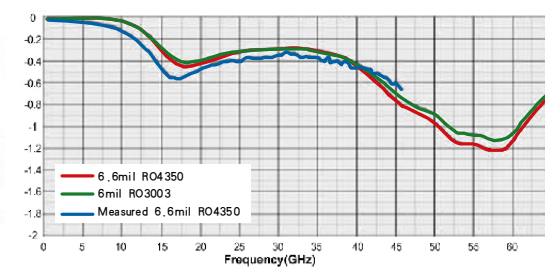

TIME DOMAIN

- Rise and fall times
- Eye opening
- Jitter

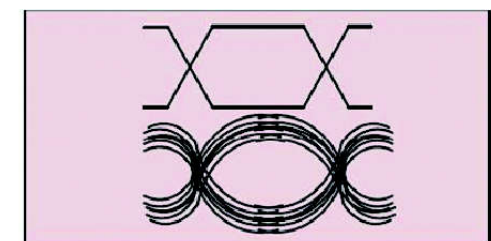


Fig.2 Frequency domain and time domain parameters




General Purpose Non-Magnetic Multilayer Ceramic Capacitors

◆Product Features

Non-Magnetic, Suitable for MRI and other equipment requiring non-magnetic.

◆Part Numbering

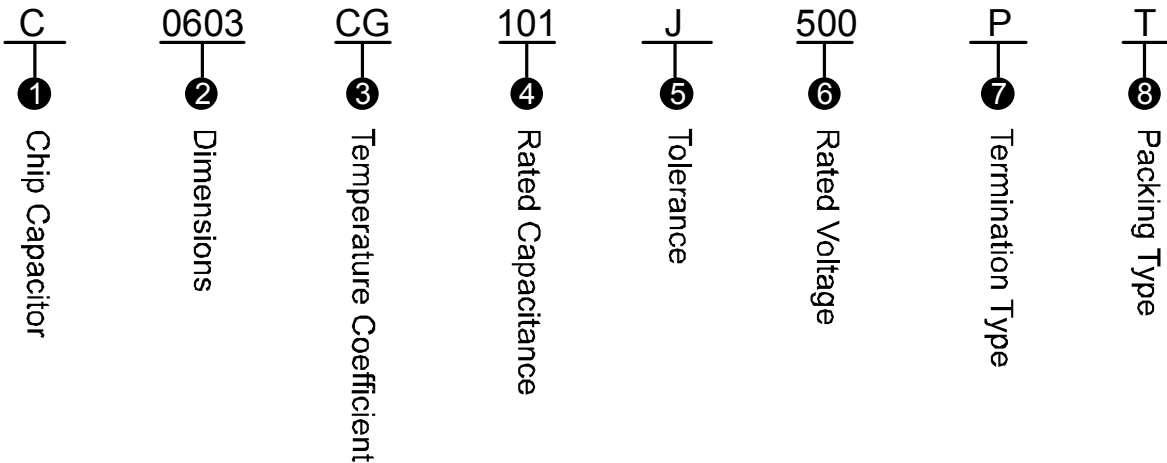

①C: General Purpose Non-Magnetic Multilayer Ceramic Capacitors

②Dimensions

unit: millimeter					
Series	L	W	T	B(Min)	B(Max)
0603	1.60±0.10	0.80±0.10	0.80±0.10	0.20	0.50
0805	2.00±.020	1.20±.020	1.40	0.25	0.60
1206	3.20±.020	1.60±.020	1.40	0.25	0.60
1210	3.20±.020	2.50±.020	2.00	0.25	0.70

③Temperature Coefficient

CG: 0±30ppm/℃
X: ±15%

④Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.
Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

⑤Tolerance

Code	B	C	D	G	J	K
Tolerance	±0.1pF	±0.25pF	±0.5pF	±2%	±5%	±10%

⑥Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
250	25	251	250
500	50	501	500
101	100	102	1000
201	200	202	2000

⑦Laser Marking

P: 100% Sn Solder over Copper Plating (RoHS Compliant)

⑧Packaging Type

T: Tape carrier packing

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0603	1.05	1.80	0.90	8.00	4.00	4.00	0.90	3.50	1000	4000	Paper
0805	1.40	2.20	1.20	8.00	4.00	4.00	0.22	3.50	1000	3000	Plastic
1206	1.91	3.51	1.30	8.00	4.00	4.00	0.25	3.50	1000	3000	Plastic
1210	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	1000	3000	Plastic

unit: V

[illegible]


unit: V

[illegible]

◆ Specifications and Test Methods

No.	Item	Specification	Test Method																		
1	Operating Temperature	C0G: -55℃ ~ +125℃ X7R: -55℃ ~ +125℃																			
2	Appearance	No defects or abnormality	Visual inspection: ×10 microscope.																		
3	Dimensions	See the previous pages	Callipers inspection																		
4	Capacitance	Shall be Within the applicable tolerance specified.																			
5	D.F.	C0G: Cap ≥ 30pF, Q ≥ 1000; Cap < 30pF, Q ≥ 400+20C X7R: D.F. ≤ 2.5%	<table border="1"> <thead> <tr> <th>Type</th><th>Capacitance</th><th>Test Voltage</th><th>Test Frequency</th></tr> </thead> <tbody> <tr> <td rowspan="2">Class 1 (C0G)</td><td>≤ 1000pF</td><td>1.0 ± 0.2Vrms</td><td>1MHz ± 10%</td></tr> <tr> <td>> 1000pF</td><td>1.0 ± 0.2Vrms</td><td>1KHz ± 10%</td></tr> <tr> <td rowspan="2">Class 2 (X7R)</td><td>≤ 10 μF</td><td>1.0 ± 0.2Vrms</td><td>1KHz ± 10%</td></tr> <tr> <td>> 10 μF</td><td>0.5 ± 0.2Vrms</td><td>120Hz ± 20%</td></tr> </tbody> </table> Before initial measurement (X7R only) to apply de-aging at 150℃ for 1hr then set for 24±2hrs at room temp.	Type	Capacitance	Test Voltage	Test Frequency	Class 1 (C0G)	≤ 1000pF	1.0 ± 0.2Vrms	1MHz ± 10%	> 1000pF	1.0 ± 0.2Vrms	1KHz ± 10%	Class 2 (X7R)	≤ 10 μF	1.0 ± 0.2Vrms	1KHz ± 10%	> 10 μF	0.5 ± 0.2Vrms	120Hz ± 20%
Type	Capacitance	Test Voltage	Test Frequency																		
Class 1 (C0G)	≤ 1000pF	1.0 ± 0.2Vrms	1MHz ± 10%																		
	> 1000pF	1.0 ± 0.2Vrms	1KHz ± 10%																		
Class 2 (X7R)	≤ 10 μF	1.0 ± 0.2Vrms	1KHz ± 10%																		
	> 10 μF	0.5 ± 0.2Vrms	120Hz ± 20%																		
6	Insulation Resistance (IR)	No less than 10GΩ or 500MΩ μF, whichever is smaller.	Voltage: DC Rated Voltage Charging Time: 1~2 min Charge/discharge current: 50mA max. Measurement Temperature: 25℃ Measurement Humidity: 75%																		
7	Dielectric withstanding voltage (DWV)	Shall be no evidence of breakdown or visible evidence of arcing or damage.	1. Test Voltage: 250% of Rated Voltage, Rated Voltage ≤ 500VDC 150% of Rated Voltage, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage, Rated Voltage > 1250VDC 2. Applied Time: 1s to 5 s 3. Charge/discharge current: 50mA max.																		

◆ Specifications and Test Methods

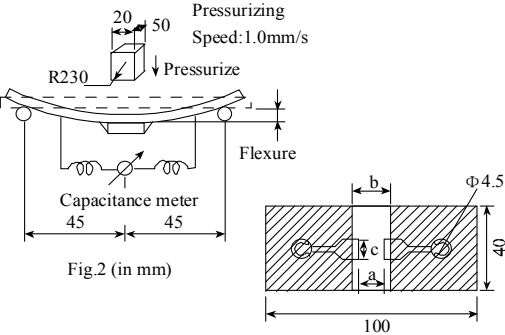No.	Item	Specification	Test Method																				
8	Temperature Coefficient	<table><tr><th>Type</th><th>Temperature coefficient ppm/℃</th></tr><tr><td>C0G</td><td>0±30</td></tr></table> <table><tr><th>Type</th><th>Temperature Characteristics</th></tr><tr><td>X7R</td><td>±15%</td></tr></table>	Type	Temperature coefficient ppm/℃	C0G	0±30	Type	Temperature Characteristics	X7R	±15%	Conduct the five cycles according to the temperatures as below. <table><tr><th>Step</th><th>Temperature(℃)</th></tr><tr><td>1</td><td>25±2℃</td></tr><tr><td>2</td><td>-55±3℃</td></tr><tr><td>3</td><td>25±2℃</td></tr><tr><td>4</td><td>125±3℃</td></tr><tr><td>5</td><td>25±2℃</td></tr></table> C0G: $TC = \frac{C_x - C_3}{C_3 \times \Delta T} \times 10^6 \text{ (ppm/℃)}$ X7R: $TC = \frac{C_x - C_3}{C_3} \times 100(\%)$	Step	Temperature(℃)	1	25±2℃	2	-55±3℃	3	25±2℃	4	125±3℃	5	25±2℃
Type	Temperature coefficient ppm/℃																						
C0G	0±30																						
Type	Temperature Characteristics																						
X7R	±15%																						
Step	Temperature(℃)																						
1	25±2℃																						
2	-55±3℃																						
3	25±2℃																						
4	125±3℃																						
5	25±2℃																						
9	Adhesive strength of termination	No removal of the terminations or other defect should occur.	Pressurizing force: 01R5/0201: 2N; 0402/0603: 5N; 0805/1206/1210/1812: 10N Test time: 10±1 sec.																				
10	Bending strength	No cracking shall occur. Cap change: C0G: within ±5% or 0.5pF whichever is larger X7R: within ±12.5%	Solder the capacitor on test jig (glass epoxy board). Then apply a force in the direction shown in below fig. Flexure: 1mm; Holding time: 5±1s 																				
11	Solderability of Termination	Shall be at least 85 percent covered with a smooth solder coating.	Immerse the capacitor in a eutectic solution requirement temperature (230±5℃) for 2±0.5 seconds. Capacitor shall be immersed to a depth of 10mm.																				

◆ Specifications and Test Methods

No.	Item	Specification	Test Method
12	Resistance to Soldering Heat	Appearance	No evidence of mechanical damage or delamination or exposed.
		Capacitance Change ΔC	C0G: Within $\pm 2.5\%$ or 0.25pF (Whichever is larger) X7R: Within $\pm 12.5\%$.
		D.F.	To meet initial requirement.
		Insulation Resistance	No less than $10\text{G}\Omega$ or $500\text{M}\Omega\mu\text{F}$, Whichever is smaller.
13	Temperature Cycle	Appearance	No evidence of mechanical damage
		Capacitance Change ΔC	C0G: Within $\pm 2.5\%$ or 0.25pF (Whichever is larger) X7R: Within $\pm 7.5\%$.
		D.F.	To meet initial requirement.
		Insulation Resistance	No less than $10\text{G}\Omega$ or $500\text{M}\Omega\mu\text{F}$, Whichever is smaller.

Immerse the capacitor in a eutectic solution at $265 \pm 5^\circ\text{C}$ for 10 ± 1 seconds. Capacitor shall be immersed to a depth of 10mm.
And following a minimum 10 minutes to maximum 24 hours cooling period.

Fix the capacitor to the supporting jig in the same manner and under the same conditions as (11).
Perform the five cycles according to the four heat treatments listed in the following table. Set it for 24 ± 2 hours at room temperature.

Step	Temperature($^\circ\text{C}$)	Time(minutes)
1	-55°C ($0 \sim -3^\circ\text{C}$)	30 ± 3
2	25°C	$2 \sim 3$
3	125°C ($0 \sim -3^\circ\text{C}$)	30 ± 3
4	25°C	$2 \sim 3$

Non-Magnetic Chip Resistors


◆ Product Features

1. Non-Magnetic chip resistors by copper plating on middle termination.
2. Suited for reflow and flow solder.
3. Suitable for no lead soldering.
4. Lead free, Meet RoHS compliant.


◆ Product Applications

MRI medical equipment, Measurement instrument, other non-magnetic applications.

◆ Part Number

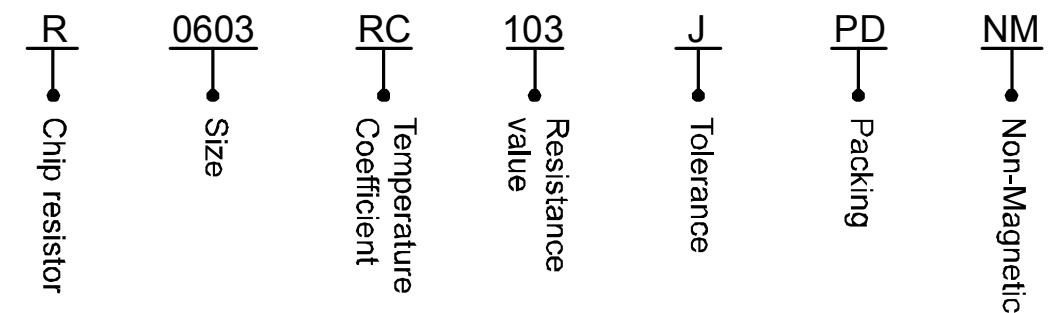


◆ Configuration

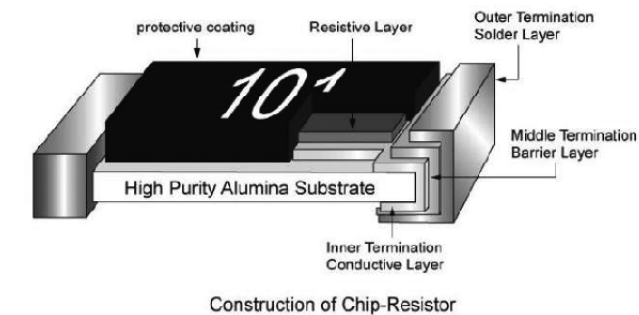

◆ Dimensions

	Size	L	W	C	D	T
	0603	1.60 ± 0.10	0.80 ± 0.10	0.30 ± 0.20	0.30 ± 0.20	0.45 ± 0.10
	0805	2.00 ± 0.10	1.25 ± 0.10	0.40 ± 0.20	0.40 ± 0.20	0.50 ± 0.10
	1206	3.10 ± 0.10	1.60 ± 0.10	0.50 ± 0.20	0.50 ± 0.25	0.55 ± 0.10

◆ Power Derating Curve

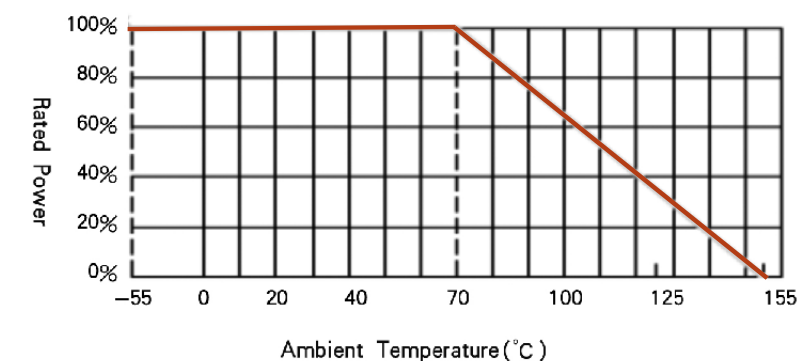

◆ Rated Value



Size	Rated Power At 70°C	RCWV Max.	Overload Voltage Max.	Tolerance	Temperature Coefficient ppm/°C	Resistance Range		Standard Resistance Value
						Min.	Max.	
0603	1/10W	50V	100V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω&1Ω	10MΩ	E-24
0805	1/8W	150V	300V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω&1Ω	10MΩ	E-24
1206	1/4W	200V	400V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω&1Ω	10MΩ	E-24

Jumper: 0603 size maximum resistance ≤50mΩ and rated current ≤1A.

0805, 1206 size maximum resistance ≤50mΩ and rated current ≤2A.

1Ω ~ 10Ω: Temperature Coefficient of Resistance for 0603, 0805, 1206 = -300 ~ +500ppm/°C.

◆ Soldering Temperature Curve

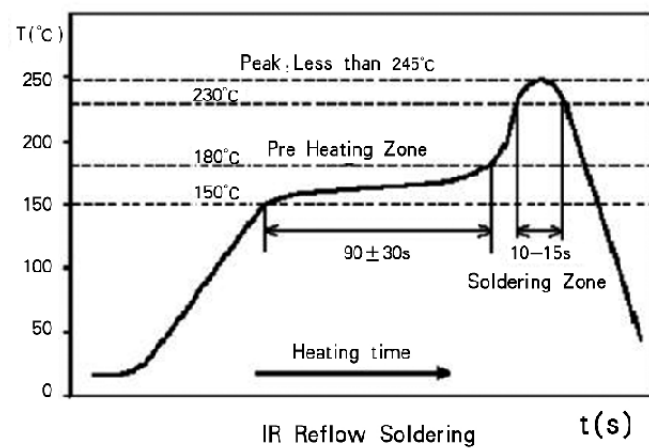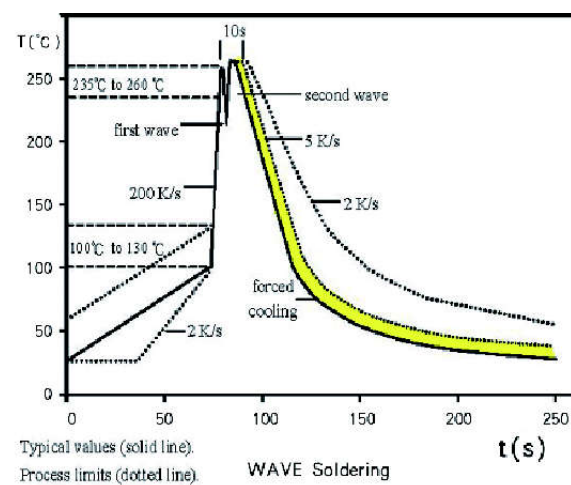

◆ Resistance Marking

R100 4 digit marking for ± 1%.
For example: 1R00 = 1Ω; R100 = 100mΩ; R047 = 47mΩ;

R10 3 digit marking for 0603 ± 1%.
For example: 1R0 = 1Ω; R10 = 100mΩ; R50 = 500mΩ;

E-24 Series

473 3 digit marking for ± 5% E24.
For example: 473 = 47kΩ; 1R5 = 1.5Ω; 0 = 0Ω;

E-96 Series

1542 4 digit marking for E96.
For example: 1542 = 15k4Ω; 22R1 = 22.1Ω;

02C 3 digit marking for E96-0603.
For example: 02C = 102 × 100 = 10.2kΩ;

◆ 0603 1% Marking Table


Code	E48	E96	Code	E48	E96	Code	E48	E96	Code	E48	E96
01	100	100	25	178	178	49	316	316	73	562	562
02		102	26		182	50		324	74		576
03	105	105	27	187	187	51	332	332	75	590	590
04		107	28		191	52		340	76		604
05	110	110	29	196	196	53	348	348	77	619	619
06		113	30		200	54		357	78		634
07	115	115	31	205	205	55	365	365	79	649	649
08		118	32		210	56		374	80		665
09	121	121	33	215	215	57	383	383	81	681	681
10		124	34		221	58		392	82		698
11	127	127	35	226	226	59	402	402	83	715	715
12		130	36		232	60		412	84		732
13	133	133	37	237	237	61	422	422	85	750	750
14		137	38		243	62		432	86		768
15	140	140	39	249	249	63	442	442	87	787	787
16		143	40		255	64		453	88		806
17	147	147	41	261	261	65	464	464	89	825	825
18		150	42		267	66		475	90		845
19	154	154	43	274	274	67	487	487	91	866	866
20		158	44		280	68		499	92		887
21	162	162	45	287	287	69	511	511	93	909	909
22		165	46		294	70		523	94		931
23	169	169	47	301	301	71	536	536	95	953	953
24		174	48		309	72		549	96		976

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multplier	10 ⁰	10 ¹	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁻¹	10 ⁻²	10 ⁻³

◆ Standard Resistance Value


E3	10				22				47							
E6	10		15		22		33		47		68					
E12	10	12	15	18	22	27	33	39	47	56	68	82				
E24	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43
	51	56	62	68	75	82	91									
E96	100	102	105	107	110	113	115	118	121	124	127	130	133	137	140	143
	150	154	158	162	165	169	174	178	182	187	191	196	200	205	210	215
	226	232	237	243	249	255	261	267	274	280	287	294	301	309	316	324
	340	348	357	365	374	383	392	402	412	422	432	442	453	454	475	499
	511	523	536	549	562	576	590	604	619	634	649	665	681	698	715	732
	768	787	806	825	845	866	887	909	931	953	975					

◆Tape and Reel Package

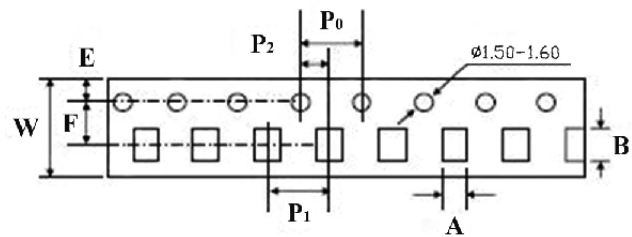

unit:millimeter

	A (mm)	B (mm)	W (mm)	F (mm)	E (mm)	P0 (mm)	P1 (mm)	P2 (mm)
0603	1.10±0.20	1.90±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	4.00±0.10	2.00±0.05
0805	1.65±0.20	2.40±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	4.00±0.10	2.00±0.05
1206	2.00±0.20	3.60±0.20	8.00±0.30	3.50±0.05	1.75±0.10	4.00±0.10	4.00±0.10	2.00±0.05

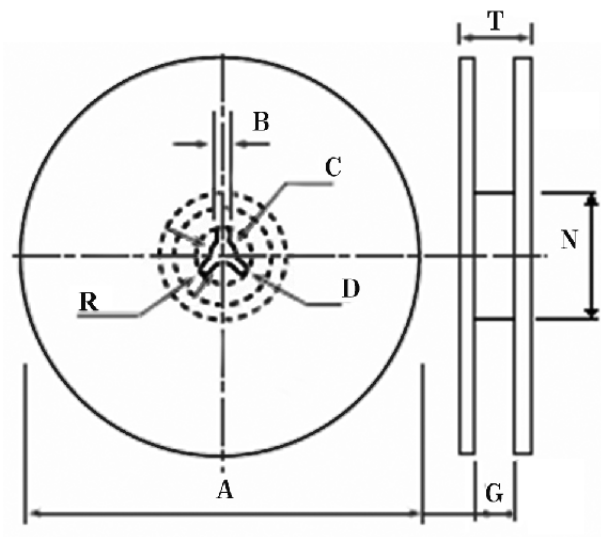


unit:millimeter

	A (mm)	N (mm)	C (mm)	D (mm)	B (mm)	G (mm)	T (mm)	Qty/reel
0603	178.0±2.0	60.0±0.5	13.0±0.5	20min	2.0±0.5	10.0±1.5	14.9max	5000
0805	254.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	10.0±1.5	14.9max	10000
1206	330.0±2.0	100.0±1.0	13.5±0.5	20min	2.0±0.5	10.0±1.5	14.9max	20000

◆Specification and Test Methods

Item	Specifications	Test Methods
DC Resistance	F: ±1%; J: ±5%;	IEC 60115-1/JIS C 5201-1, Clause 4.5. Measure the resistance value.
Short time Overload	J: $\Delta R \leq \pm (2\%+0.1\Omega)$ F: $\Delta R \leq \pm (1\%+0.05\Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.13. 2.5 x Rated voltage or Max. Overload Voltage for 5 second. Measure resistance after 30 minutes.
Solderability	Over 95% of termination must be covered with (Sn+Ag+Cu)	IEC 60115-1/JIS C 5201-1, Clause 4.17. After immersing flux, dip in the 245±2℃ molten solder bath for 3±0.5sec.
Resistance to Solder Heat	J: $\Delta R \leq \pm (1\%+0.1\Omega)$ F: $\Delta R \leq \pm (0.5\%+0.05\Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.18. With 260±5℃ for 10±1 sec.
Temperature Coefficient of Resistance(TCR)	Refer to the rating table information.	IEC 60115-1/JIS C 5201-1, Clause 4.8. Test temperature point is -55℃ and +155℃.
Load Life Humidity	J: $\Delta R \leq \pm (3\%+0.1\Omega)$ F: $\Delta R \leq \pm (1\%+0.05\Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.24. Maintain the temperature of the resistor at 40±2℃ and 90%~95% R.H. with the rated voltage applied. Cycle ON for 1.5 hours and OFF for 0.5hour for 1000(-0~+48) hours. After 1-4 hours, measure the resistance value.
Load Life	J: $\Delta R \leq \pm (3\%+0.1\Omega)$ F: $\Delta R \leq \pm (1\%+0.05\Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.25. Permanent resistance change after 1000(-0~+48) hours (1.5 hours ON, 0.5 hour OFF) at RCWV or Max. Keep the resistor at 70±2℃.
Temperature Cycle	J: $\Delta R \leq \pm (1\%+0.1\Omega)$ F: $\Delta R \leq \pm (0.5\%+0.05\Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.19. Repeat 5 cycles as follows -55℃(30 Min.), 25℃(2-3Min.), +155℃(30Min.).
Insulation Resistance	Between termination and coating must be over 1000MΩ.	IEC 60115-1/JIS C 5201-1, Clause 4.6. Test voltage: 100±15V.
Bending Strength	J: $\Delta R \leq \pm (1\%+0.1\Omega)$ F: $\Delta R \leq \pm (0.5\%+0.05\Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.33. Resistance change after bended on the 90mm PCB. Bend: 3mm for 0603, 0805. 2mm for 1206.

Single Layer Chip Ceramic Capacitor(SLC)

General SLC	Margin SLC	Surface Mounting SLC	Array SLC	Multi-PAD SLC
SG	SM	SS	SA	SP
				
Applications: RF, Microwave and Millimeter Wave. Frequency: 100MHz~100GHz, Capacitance: 0.05~10000pF	Applications: RF, Microwave and Millimeter Wave. Frequency: 100MHz~100GHz, Capacitance: 0.05~10000pF	High Precision Single Layer Series Capacitor	An array consisting of multiple single-layer capacitors, suitable for multiple coupling and bypassing.	Multiple capacitance value, Binary Tunable Single Layer Capacitor, Suited for Tuning Design or Microwave Integrated Circuit.

Meet Standard: MIL-PRF-49464C

◆ Inspection Item

Group	Item	Test Method	Test Condition
A1	Burn in	-	-
A1	Capacitance	-	100%
A1	Dissipation Factor(D.F.)	-	100%
A1	IR	-	100%
A1	DWV	-	100%
A3	Visual	Method 2032 of MIL-STD-883	-
A4	Solderability	Method 2022 of MIL-STD-883	-
B1	Bond Strength	Method 2011 of MIL-STD-883	D, 5 grams minimum with .001" dia wire
B1	Die shear Strength	Method 2019 of MIL-STD-883	Limit per MIL-STD-883, Figure 2019-4
B2	Temperature Coefficient	-	-
C1	Thermal Shock and Immersion	Method 107,104 of MIL-STD-202	Thermal shock: A; Immersion: B
C2	Resistance to Solder Heat	Method 210 of MIL-STD-202	C, 260℃ for 20 seconds.
C2	Moisture Resistance	Method 106 of MIL-STD-202	-
C4	Life	Method 108 of MIL-STD-202	Applied 200% rated voltage, 2000Hous.
C3	Humidity, steady state, low voltage	Method 103 of MIL-STD-202	Condition A.

◆ Product Features

Suited for Conducting Resin, AuSn Eutectic Soldering, Gold wire Bonding.

ESD Proof, RoHS Compliant, Frequency up to 100GHz.


Rated Voltage up to 100VDC

Capacitance: 0.04~10000pF

◆ Product Applications

DC Blocking, RF Bypass, Active Filter, Impedance Matching at RF/Microwave Frequencies.

◆ Part Number

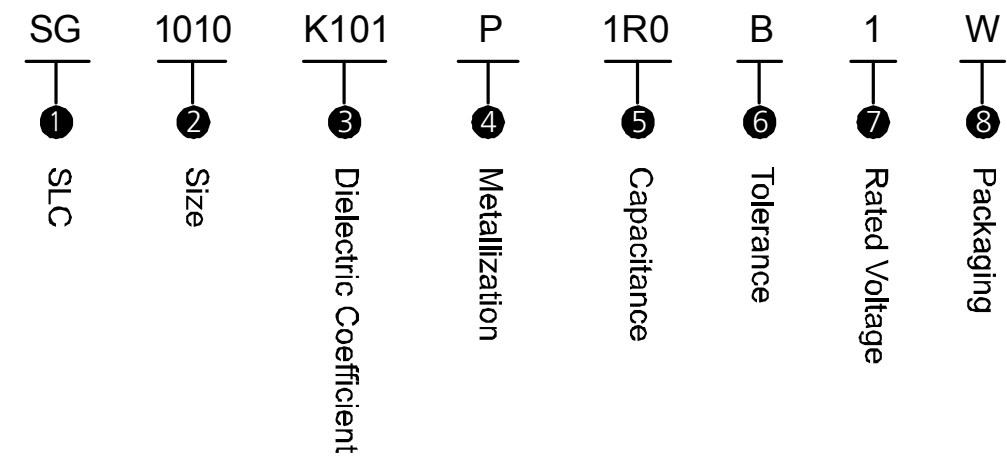

① SLC Series Capacitors

General SLC	Margin SLC	Surface Mounting SLC
SG	SM	SS
		
Applications: RF, Microwave and Millimeter Wave. Frequency: 100MHz~100GHz, Capacitance: 0.05~10000pF	Applications: RF, Microwave and Millimeter Wave. Frequency: 100MHz~100GHz, Capacitance: 0.05~10000pF	High Precision Single Layer Series Capacitor

② Size

The first two digits is length, The second two digits is width, Unit: mil;

For example: 1010, Length is 10mil (0.254mm), Width is 10mil (0.254mm).

③ Dielectric Coefficient

Dielectric Coefficient < 10, K6R6=6.6; Dielectric Coefficient ≥ 10, K101=100.

Dielectric Kind	Dielectric Constant	Temperature Coefficient	Temperature Range	Max. D. F	I.R. Min@ 25°C
I Type	3.8	0 ± 15ppm	−55 ~ 125°C	0.01%@1MHz	10 ¹²
	3.9	0 ± 15ppm	−55 ~ 125°C	0.01%@1MHz	10 ¹²
	6.6	0 ± 15ppm	−55 ~ 125°C	0.01%@1MHz	10 ¹²
	8.7	+120 ± 25ppm	−55 ~ 125°C	0.01%@1MHz	10 ¹²
	9.6	+180 ± 50ppm	−55 ~ 125°C	0.06%@1MHz	10 ¹²
	9.8	+180 ± 50ppm	−55 ~ 125°C	0.06%@1MHz	10 ¹²
	12.6	0 ± 30ppm	−55 ~ 125°C	0.01%@1MHz	10 ¹²
	20	0 ± 30ppm	−55 ~ 125°C	0.10%@1MHz	10 ¹²
	40	0 ± 30ppm	−55 ~ 125°C	0.20%@1MHz	10 ¹²
	50	0 ± 30ppm	−55 ~ 125°C	0.50%@1MHz	10 ¹²
	84	0 ± 30ppm	−55 ~ 125°C	0.50%@1MHz	10 ¹⁰
II Type	150	-1500 ± 400ppm	−55 ~ 125°C	0.25%@1MHz	10 ¹²
	300	+5% ~ −10%	−55 ~ 125°C	1.00%@1MHz	10 ¹¹
	1100	+10% ~ −10%	−55 ~ 125°C	1.50%@1MHz	10 ¹¹
	2200	+3% ~ −10%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	4000	0% ~ −35%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
III Type	5000	0% ~ −60%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	11000	0% ~ −80%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	25000	± 15%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹⁰
	35000	± 15%	−55 ~ 125°C	2.50%@1MHz, 4.0%@1KHz	10 ¹⁰

④ Metallization

Code	Sputter Layer		Plating Layer	
	Metal	Thickness	Metal	Thickness
M	TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
P	TiW/Ni/Au	300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 500 Å	Au	≥ 1.3 μm
S	Ti/Ni/Au	500 Å ~ 2000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
Q	Ti/Au	500 Å ~ 2000 Å / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
T	TaN/TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
F	TaN/TiW/Ni/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm

⑤ Capacitance

Less than 10pF, 1R0=1.0pF; No less than 10pF, 101=100pF.

⑥ Tolerance

Code	A	B	C	D	F	G	J	K	M
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1 %	± 2 %	± 5 %	± 10 %	± 20 %

⑦ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
B	16	2	25
5	50	1	100

⑧ Packaging Type

W: Waffle Packaging; G: Stick Box; R: Film Ring.

◆SG Series Capacitance Table

Cap.pF	Size (inch/millimeter)																
	1010 (.254 × .254)				1212 (.305 × .305)				1515 (.381 × .381)				2020 (.508 × .508)				
	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	
0.04	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6					
0.06	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	
0.08	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	
0.1	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	
0.2	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	
0.3	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40	
0.4	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	
0.5	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	
0.6	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40	
0.8	300	300	300	300	150	150	150	150	84	84	84	84	40	40	40	40	
1.0	300	300	300	300	150	150	150	150	84	84	84	84	84	84	84	84	
1.2	300	300	300	300	150	150	150	150	84	84	84	84	84	84	84	84	
1.5	300	300	300	300	300	300	300	300	150	150	150	150	84	84	84	84	
1.8	300	300	300	300	300	300	300	300	150	150	150	150	84	84	84	84	
2.0	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150	
2.2	1100	1100	1100	1100	300	300	300	300	150	150	150	150	150	150	150	150	
2.7	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150	
3.3	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	150	150	150	150	
3.9	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	
4.7	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	
5.6	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	
6.8	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	
8.2	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	
10	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	
12	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	
15	4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	
18	4000	4000	4000	4000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	
20	4000	4000	4000	4000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	
22	4000	4000	4000	4000	4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100	
27	4000	4000	4000	4000	4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100	
33	5000	5000	5000	5000	4000	4000	4000	4000	4000	4000	4000	4000	2200	2200	2200	2200	
39	15000	15000	15000	15000	4000	4000	4000	4000	4000	4000	4000	4000	2200	2200	2200	2200	
47	15000	15000	15000		15000	15000	15000	15000	4000	4000	4000	4000	2200	2200	2200	2200	
56	15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	4000	4000	4000	4000	
68	15000	15000	15000		15000	15000	15000		5000	5000	5000	5000	4000	4000	4000	4000	
82	25000	25000	25000		15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	
100	25000	25000	25000		25000	25000	25000		15000	15000	15000	15000	5000	5000	5000	5000	
120	25000	25000			25000	25000			15000	15000	15000		15000	15000	15000	15000	
150	25000				25000				15000	15000	15000		15000	15000	15000	15000	
180	35000				25000				25000	25000	25000		15000	15000	15000	15000	
200	35000				25000				25000	25000			15000	15000	15000		
220	35000				35000				25000	25000			15000	15000	15000		
270					35000				25000				25000	25000	25000		
330									25000				25000	25000	25000		
390									35000				25000	25000			
470									35000				25000				
560													25000				
680													35000				
820													35000				
1000													35000				
1200																	
1500																	
1800																	
2200																	
2700																	
3300			I Type Dielectric				II Type Dielectric				III Type Dielectric						

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.
2) Special Capacitance and rated voltage. Please contact Dalicap.

◆SG Series Capacitance Table

Cap. pF	Size (inch/millimeter)																			
	2525 (.635×.635)				3030 (.762×.762)				3535 (.889×.889)				4040 (1.016×1.016)				5050 (1.270×1.270)			
	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V
0.04																				
0.06	3.8	3.8	3.8	3.8																
0.08	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8												
0.1	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8								
0.2	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8				
0.3	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
0.4	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8
0.5	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8
0.6	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8
0.8	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
1.0	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
1.2	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
1.5	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6
1.8	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6
2.0	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
2.2	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
2.7	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
3.3	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40
3.9	150	150	150	150	84	84	84	84	84	84	84	84	84	84	84	84	40	40	40	40
4.7	150	150	150	150	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40
5.6	300	300	300	300	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40
6.8	300	300	300	300	150	150	150	150	150	150	150	150	84	84	84	84	40	40	40	40
8.2	300	300	300	300	150	150	150	150	150	150	150	150	150	150	150	150	84	84	84	84
10	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150	150	150	150	150
12	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150
15	1100	1100	1100	1100	300	300	300	300	300	300	300	300	300	300	300	300	150	150	150	150
18	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150
20	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150
22	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150
27	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	300	300	300	300
33	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300
39	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300
47	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300
56	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
68	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
82	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
100	4000	4000	4000	4000	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
120	5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
150	5000	5000	5000	5000	5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
180	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
200	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
220	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
270	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
330	15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	4000	4000	4000	4000	4000	4000	4000	4000
390	15000	15000	15000		15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	4000	4000	4000	4000
470	25000	25000			15000	15000	15000		15000	15000	15000	15000	15000	15000	15000	15000	4000	4000	4000	4000
560	25000	25000			15000	15000	15000		15000	15000	15000		15000	15000	15000	15000	4000	4000	4000	4000
680	25000				25000	25000	25000		15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000
820	35000				25000	25000			15000	15000	15000		15000	15000	15000		15000	15000	15000	15000
1000	35000				25000	25000			25000	25000	25000		15000	15000	15000		15000	15000	15000	15000
1200	35000				25000				25000	25000			25000	25000			15000	15000	15000	
1500					35000				25000				25000	25000			15000	15000	15000	
1800					35000				35000				25000				25000	25000	25000	
2200									35000				25000				25000	25000		
2700									35000				35000				25000			
3300			I Type Dielectric				II Type Dielectric				III Type Dielectric						35000			

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.
2) Special Capacitance and rated voltage, Please contact Dalicap.

◆SM Series Capacitance Table

[illegible]

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.
2) Special Capacitance and rated voltage, Please contact Dalicap.

◆SM Series Capacitance Table

Cap. pF	Size (inch/millimeter)																			
	2525 (.635×.635)				3030 (.762×.762)				3535 (.889×.889)				4040 (1.016×1.016)				5050 (1.270×1.270)			
	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V
0.04																				
0.06	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8												
0.08	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8								
0.1	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8								
0.2	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
0.3	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
0.4	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	3.8	3.8	3.8
0.5	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
0.6	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
0.8	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
1.0	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6
1.2	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6
1.5	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
1.8	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
2.0	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
2.2	150	150	150	150	84	84	84	84	40	40	40	40	40	40	40	40	40	40	40	40
2.7	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40	40	40	40	40
3.3	150	150	150	150	84	84	84	84	84	84	84	84	84	84	84	84	40	40	40	40
3.9	150	150	150	150	150	150	150	150	84	84	84	84	84	84	84	84	40	40	40	40
4.7	300	300	300	300	150	150	150	150	84	84	84	84	84	84	84	84	84	84	84	84
5.6	300	300	300	300	150	150	150	150	150	150	150	150	84	84	84	84	84	84	84	84
6.8	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150	84	84	84	84
8.2	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150	84	84	84	84
10	300	300	300	300	300	300	300	300	300	300	300	300	150	150	150	150	84	84	84	84
12	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150	150	150	150	150
15	1100	1100	1100	1100	300	300	300	300	300	300	300	300	300	300	300	300	150	150	150	150
18	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150
20	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300	150	150	150	150
22	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300
27	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	300	300	300	300
33	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300
39	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300
47	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
56	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
68	4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
82	4000	4000	4000	4000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100
100	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
120	5000	5000	5000	5000	5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200	1100	1100	1100	1100
150	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200
180	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200
200	15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
220	15000	15000	15000		5000	5000	5000	5000	5000	5000	5000	5000	4000	4000	4000	4000	2200	2200	2200	2200
270	15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	5000	5000	5000	5000	2200	2200	2200	2200
330	15000	15000	15000		15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	4000	4000	4000	4000
390	25000	25000			15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000	4000	4000	4000	4000
470	25000	25000			15000	15000	15000		15000	15000	15000		15000	15000	15000	15000	5000	5000	5000	5000
560	35000	35000			15000	15000	15000		15000	15000	15000		15000	15000	15000		5000	5000	5000	5000
680	35000	35000			25000	25000			15000	15000	15000		15000	15000	15000		15000	15000	15000	15000
820	35000				25000				25000	25000	25000		15000	15000	15000		15000	15000	15000	15000
1000					35000				25000	25000			25000	25000	25000		15000	15000	15000	15000
1200					35000				25000				25000	25000			15000	15000	15000	
1500									35000				25000	25000			15000	15000	15000	
1800									35000				35000	35000			25000	25000		
2200													35000				25000	25000		
2700													35000				25000			
3300			I Type Dielectric				II Type Dielectric				III Type Dielectric						35000			

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.
2) Special Capacitance and rated voltage, Please contact Dalicap.

◆SS Series Capacitance Table

Cap.pF	Size (inch/millimeter)																
	2010 (.508×.254) 5mil Gap				4020 (1.016×.508) 10mil Gap				6030 (1.524×.762) 10mil Gap				8040 (2.032×1.016) 20mil Gap				
	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	
0.06	40	40	40	40	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
0.08	40	40	40	40	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
0.1	84	84	84	84	40	40	40	40	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	
0.2	150	150	150	150	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6	
0.3	300	300	300	300	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6	
0.4	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40	
0.5	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40	
0.6	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40	
0.8	1100	1100	1100	1100	150	150	150	150	40	40	40	40	40	40	40	40	
1.0	1100	1100	1100	1100	150	150	150	150	84	84	84	84	40	40	40	40	
1.2	1100	1100	1100	1100	150	150	150	150	84	84	84	84	40	40	40	40	
1.5	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84	
1.8	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84	
2.0	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84	
2.2	1100	1100	1100	1100	300	300	300	300	150	150	150	150	84	84	84	84	
2.7	2200	2200	2200	2200	300	300	300	300	150	150	150	150	84	84	84	84	
3.3	2200	2200	2200	2200	1100	1100	1100	1100	150	150	150	150	150	150	150	150	
3.9	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300	150	150	150	150	
4.7	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300	150	150	150	150	
5.6	4000	4000	4000	4000	1100	1100	1100	1100	300	300	300	300	300	300	300	300	
6.8	4000	4000	4000	4000	1100	1100	1100	1100	300	300	300	300	300	300	300	300	
8.2	5000	5000	5000	5000	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300	
10	5000	5000	5000	5000	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300	
12	15000	15000	15000	15000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	
15	15000	15000	15000	15000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	
18	15000	15000	15000		2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100	
20	15000	15000	15000		4000	4000	4000	4000	1100	1100	1100	1100	1100	1100	1100	1100	
22	15000	15000	15000		4000	4000	4000	4000	1100	1100	1100	1100	1100	1100	1100	1100	
27	25000	25000	25000		4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100	
33	25000	25000			5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200	
39	25000				5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200	
47	35000				15000	15000	15000	15000	2200	2200	2200	2200	2200	2200	2200	2200	
56	35000				15000	15000	15000	15000	4000	4000	4000	4000	2200	2200	2200	2200	
68	35000				15000	15000	15000		4000	4000	4000	4000	4000	4000	4000	4000	
82					15000	15000	15000		5000	5000	5000	5000	5000	5000	5000	5000	
100					25000	25000	25000		5000	5000	5000	5000	5000	5000	5000	5000	
120					25000	25000			15000	15000	15000	15000	5000	5000	5000	5000	
150					25000				15000	15000	15000	15000	5000	5000	5000	5000	
180					25000				15000	15000	15000		15000	15000	15000	15000	
200					35000				15000	15000	15000		15000	15000	15000	15000	
220					35000				25000	25000	25000		15000	15000	15000	15000	
270					35000				25000	25000	25000		15000	15000	15000	15000	
330									25000	25000			15000	15000	15000		
390									25000				25000	25000	25000		
470									35000				25000	25000			
560									35000				25000	25000			
680									35000				25000				
820													35000				
1000													35000				
1200													35000				
			I Type Dielectric				II Type Dielectric				III Type Dielectric						

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.


2) Special Capacitance and rated voltage, Please contact Dalicap.

SA Series Array SLC

◆ Product Features

Simplified assembly. Can be integrated into IC package to reduce bond wire lengths and reduce assembly costs. SA array SLC is mainly used in GaAs IC. Capacitor quantity is 10 pieces maximum.


The total size is theoretically minimum 20×10 mils.



◆ Product Applications

Decoupling, RF Bypass, DC Blocking for GaAs IC at RF/Microwave Frequencies.

◆ **Part Number**

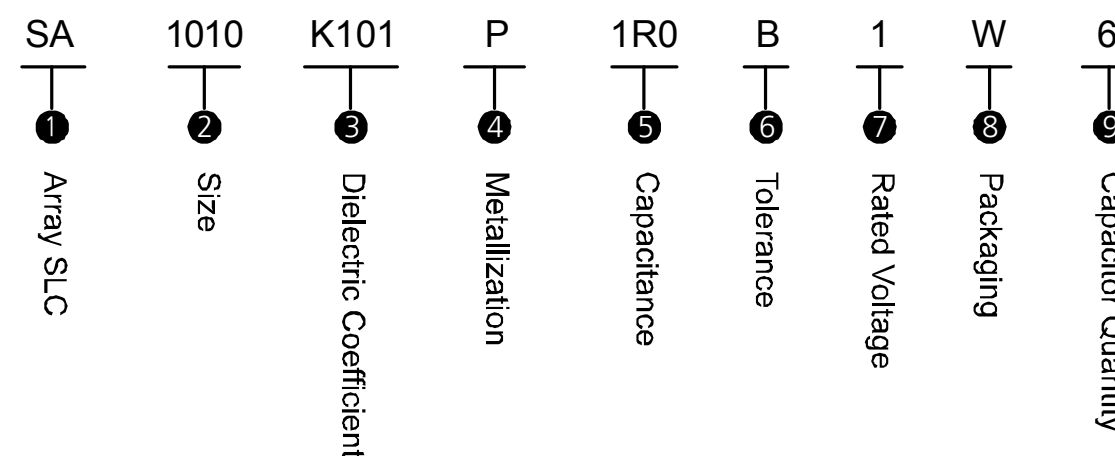

①SLC Series Capacitors

SG	SM	SS	SA	SP
General SLC	Margin SLC	Surface Mounting SLC	Array SLC	Multi-PAD SLC

② Size

The first two digits is length, The second two digits is width, Unit: mil;

For example: 1010, Length is 10mil (0.254mm), Width is 10mil (0.254mm).

③ Dielectric Coefficient

Dielectric Coefficient < 10, K6R6=6.6; Dielectric Coefficient ≥ 10, K101=100.

Dielectric Kind	Dielectric Constant	Temperature Coefficient	Temperature Range	Max. D. F	I.R. Min@ 25°C
I Type	3.8	0±15ppm	−55~125℃	0.01%@1MHz	10 ¹²
	3.9	0±15ppm	−55~125℃	0.01%@1MHz	10 ¹²
	6.6	0±15ppm	−55~125℃	0.01%@1MHz	10 ¹²
	8.7	+120±25ppm	−55~125℃	0.01%@1MHz	10 ¹²
	9.6	+180±50ppm	−55~125℃	0.06%@1MHz	10 ¹²
	9.8	+180±50ppm	−55~125℃	0.06%@1MHz	10 ¹²
	12.6	0±30ppm	−55~125℃	0.01%@1MHz	10 ¹²
	20	0±30ppm	−55~125℃	0.10%@1MHz	10 ¹²
	40	0±30ppm	−55~125℃	0.20%@1MHz	10 ¹²
	50	0±30ppm	−55~125℃	0.50%@1MHz	10 ¹²
	84	0±30ppm	−55~125℃	0.50%@1MHz	10 ¹⁰
	150	-1500±400ppm	−55~125℃	0.25%@1MHz	10 ¹²
IIType	300	+5%~-10%	−55~125℃	1.00%@1MHz	10 ¹¹
	1100	+10%~-10%	−55~125℃	1.50%@1MHz	10 ¹¹
	2200	+3%~-10%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	4000	0%~-35%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	5000	0%~-60%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
IIIType	11000	0%~-80%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹¹
	25000	±15%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹⁰
	35000	±15%	−55~125℃	2.50%@1MHz, 4.0%@1KHz	10 ¹⁰

④ Metallization

Code	Sputter Layer		Plating Layer	
	Metal	Thickness	Metal	Thickness
M	TiW/Au	300Å~1000Å/300Å~500Å	Au	≥ 1.3μm
P	TiW/Ni/Au	300Å~1000Å /0.2μm~0.6μm /300Å~500Å	Au	≥ 1.3μm
S	Ti/Ni/Au	500Å~2000Å /0.2μm~0.6μm /300Å~1000Å	Au	≥ 1.3μm
Q	Ti/Au	500Å~2000Å/300Å~1000Å	Au	≥ 1.3μm
T	TaN/TiW/Au	300Å~1000Å/300Å~1000Å/300Å~500Å	Au	≥ 1.3μm
F	TaN/TiW/Ni/Au	300Å~1000Å /300Å~1000Å /0.2μm~0.6μm /300Å~1000Å	Au	≥ 1.3μm

⑤ Capacitance

Less than 10pF, 1R0=1.0pF; No less than 10pF, 101=100pF.

⑥ Tolerance

Code	A	B	C	D	F	G	J	K	M
Tolerance	±0.05pF	±0.1pF	±0.25pF	±0.5pF	±1%	±2%	±5%	±10%	±20%

⑦ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
B	16	2	25
5	50	1	100

⑧ Packaging Type

W: Waffle Packaging; G: Stick Box; R: Film Ring.

⑨ Capacitor Quantity

Capacitor quantity 10 pieces Maximum.


SA Series Single Capacitance Table

WVDC(Rated voltage) Unit: V

Cap.pF	Size(inch/millimeter)																	
	1010 (.254×.254)		1212 (.305×.305)		1515 (.381×.381)		2020 (.508×.508)		2525 (.635×.635)		3030 (.762×.762)		3535 (.889×.889)		4040 (1.016×1.016)		5050 (1.270×1.270)	
	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC
0.04	9.6	50	9.6	100	9.6	100												
0.06	9.6	50	9.6	50	9.6	100	3.8	50	3.8	100								
0.08	40	100	9.6	50	9.6	100	9.6	100	3.8	100	3.8	100						
0.1	40	100	40	100	9.6	50	9.6	100	3.8	50	3.8	100	3.8	100				
0.2	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50	3.8	100	3.8	100
0.3	84	100	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50	3.8	100
0.4	84	50	84	100	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50
0.5	84	50	84	50	40	50	40	100	40	100	9.6	50	9.6	50	9.6	100	3.8	50
0.6	150	100	84	50	84	100	40	100	40	100	40	100	9.6	50	9.6	100	9.6	100
0.8	300	100	150	100	84	50	40	50	40	100	40	100	40	100	9.6	50	9.6	100
1.0	300	100	150	50	84	50	84	100	40	100	40	100	40	100	9.6	50	9.6	50
1.2	300	100	150	50	84	50	84	100	40	50	40	100	40	100	9.6	50	9.6	50
1.5	300	50	300	100	150	50	84	50	40	50	40	100	40	100	40	100	9.6	50
1.8	300	50	300	50	150	50	84	50	84	100	40	50	40	100	40	100	40	100
2.0	300	50	300	50	150	50	150	100	84	100	40	50	40	50	40	100	40	400
2.2	1100	50	300	50	150	50	150	100	84	50	84	100	40	50	40	100	40	100
2.7	1100	100	300	50	300	100	150	50	84	50	84	100	40	50	40	50	40	100
3.3	1100	100	1100	100	300	50	150	50	150	100	84	50	84	100	40	50	40	100
3.9	1100	100	1100	100	300	50	300	100	150	50	84	50	84	100	84	100	40	100
4.7	1100	50	1100	100	1100	100	300	100	150	50	150	100	84	50	84	100	40	50
5.6	1100	50	1100	100	1100	100	300	50	300	100	150	50	84	50	84	50	40	50
6.8	1100	50	1100	50	1100	100	300	50	300	100	150	50	150	100	84	50	84	100
8.2	2200	100	1100	50	1100	100	300	50	300	50	150	50	150	50	150	100	150	100
10	2200	50	1100	50	1100	50	1100	100	300	50	300	100	150	50	150	50	150	100
12	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	300	100	150	50	150	100
15	4000	100	2200	50	1100	50	1100	100	1100	100	300	50	300	100	300	100	150	100
18	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	300	100	150	50
20	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	300	50	150	50
22	4000	50	4000	100	2200	50	1100	50	1100	100	1100	100	300	50	300	50	150	50
27	4000	50	4000	50	2200	50	1100	50	1100	100	1100	100	300	50	300	50	300	100
33	5000	50	4000	50	4000	100	2200	100	1100	50	1100	100	1100	100	300	50	300	50
39	15000	100	4000	50	4000	50	2200	50	1100	50	1100	50	1100	100	1100	100	300	50
47	15000	50	15000	100	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50
56	15000	50	15000	100	5000	50	4000	100	2200	50	1100	50	1100	50	1100	100	1100	100
68	15000	50	15000	50	5000	50	4000	100	2200	50	2200	100	1100	50	1100	100	1100	100
82	25000	50	15000	50	15000	100	5000	100	2200	50	2200	50	2200	100	2200	100	1100	100
100	25000	25	25000	50	15000	100	5000	50	4000	100	2200	50	2200	100	2200	100	1100	100
120	25000	25	25000	25	15000	50	15000	100	5000	100	2200	50	2200	50	2200	100	1100	50
150	25000	16	25000	16	15000	50	15000	100	5000	50	5000	100	2200	50	2200	50	1100	50
180	35000	16	25000	16	25000	50	15000	100	5000	50	5000	100	5000	100	4000	100	2200	100
200	35000	16	25000	16	25000	25	15000	50	15000	100	5000	50	5000	100	4000	100	2200	100
220	35000	16	35000	16	25000	25	15000	50	15000	100	5000	50	5000	100	4000	100	2200	100
270			35000	16	25000	16	25000	50	15000	100	5000	50	5000	50	4000	50	2200	50
330					25000	16	25000	50	15000	50	15000	100	5000	50	4000	50	4000	100
390					35000	16	25000	25	15000	50	15000	100	15000	100	15000	100	4000	100
470					35000	16	25000	16	25000	25	15000	50	15000	100	15000	100	4000	50
560							25000	16	25000	25	15000	50	15000	50	15000	100	4000	50
680							35000	16	25000	16	25000	50	15000	50	15000	100	5000	50
820							35000	16	35000	25	25000	25	15000	50	15000	50	15000	100
1000							35000	16	25000	16	25000	16	25000	50	15000	50	15000	100
1200									35000	16	25000	16	25000	25	25000	25	15000	20
1500											35000	16	25000	16	25000	25	15000	50
1800											35000	16	35000	16	25000	16	25000	50
2200													35000	16	25000	16	25000	25
2700													35000	16	35000	16	25000	16
3300					I Type Dielectric		II Type Dielectric		III Type Dielectric								35000	25

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.
2) Special Capacitance and rated voltage, Please contact Dalicap.

SP Series Multi-Pad SLC



Product Features

Small geometric size is suitable for microwave circuit and is good for circuit design and adjustment.

SP Array SLC is mainly customized according to customer drawings and requirements.

Maximum overall size:10×10mm, Minimum overall size:0.3×0.3mm,

Minimum machining gap: 50μm, Thickness: 0.15~0.25mm.

Product Applications

Matching Networks, Parallel Resonance Circuits, Dielectric Resonator Tuning & Coupling at RF/Microwave Frequencies.

Part Number

